


# TAPER-LOCK BUSSNINGAR

## TAPER BUSHES

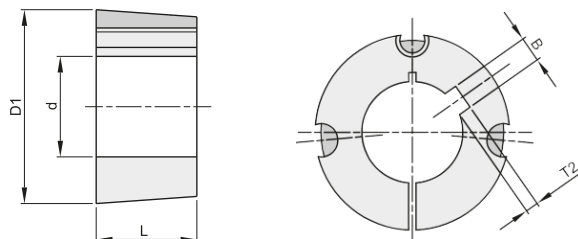

### BUSSNING 1008

D1 = 35  
L = 22,3

Skrivar = 1/4"  
Åtdragningsmoment = 5,6 Nm

### BUSSNING 1108

D1 = 38  
L = 22,3

Skrivar = 1/4"  
Åtdragningsmoment = 5,6 Nm

| Axel dim. | Artikelnr | Kilspår | Kilspårs djup |      |
|-----------|-----------|---------|---------------|------|
| d         |           | B       | T2            | Kg.  |
| 10        | 1008010   | 3       | 1,4           | 0,13 |
| 11        | 1008011   | 4       | 1,8           | 0,13 |
| 12        | 1008012   | 4       | 1,8           | 0,12 |
| 14        | 1008014   | 5       | 2,3           | 0,12 |
| 15        | 1008015   | 5       | 2,3           | 0,11 |
| 16        | 1008016   | 5       | 2,3           | 0,11 |
| 18        | 1008018   | 6       | 2,8           | 0,10 |
| 19        | 1008019   | 6       | 2,8           | 0,10 |
| 20        | 1008020   | 6       | 2,8           | 0,09 |
| 22        | 1008022   | 6       | 2,8           | 0,08 |
| 24        | 1008024   | 8       | 1,3           | 0,07 |
| 25        | 1008025   | 8       | 1,3           | 0,07 |


| Axel dim. | Artikelnr | Kilspår | Kilspårs djup |      |
|-----------|-----------|---------|---------------|------|
| d         |           | B       | T2            | Kg.  |
| 10        | 1108010   | 4       | 1,8           | 0,16 |
| 11        | 1108011   | 4       | 1,8           | 0,15 |
| 12        | 1108012   | 5       | 2,3           | 0,15 |
| 15        | 1108015   | 5       | 2,3           | 0,14 |
| 16        | 1108016   | 5       | 2,3           | 0,14 |
| 18        | 1108018   | 6       | 2,8           | 0,13 |
| 19        | 1108019   | 6       | 2,8           | 0,13 |
| 20        | 1108020   | 6       | 2,8           | 0,12 |
| 22        | 1108022   | 6       | 2,8           | 0,11 |
| 24        | 1108024   | 8       | 3,3           | 0,10 |
| 25        | 1108025   | 8       | 3,3           | 0,09 |
| 28        | 1108028   | 8       | 1,3           | 0,07 |



info@transflex.nu

# TAPER-LOCK BUSSNINGAR

## TAPER BUSHES

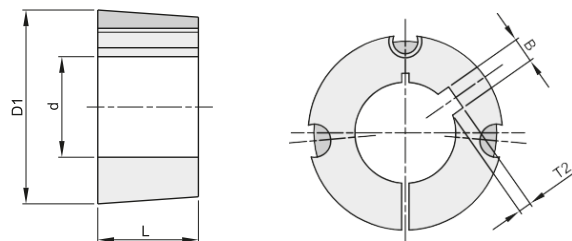

### BUSSNING 1210

D1 = 47  
L = 25,4

Skrubar = 1/4"  
Åtdragningsmoment = 20 Nm

### BUSSNING 1215

D1 = 47  
L = 38,1

Skrubar = 1/4"  
Åtdragningsmoment = 20 Nm


| Axel dim. | Artikelnr | Kilspår | Kilspårs djup |      |
|-----------|-----------|---------|---------------|------|
| d         |           | B       | T2            | Kg.  |
| 11        | 1210011   | 4       | 1,8           | 0,28 |
| 12        | 1210012   | 4       | 1,8           | 0,28 |
| 14        | 1210014   | 5       | 2,3           | 0,27 |
| 15        | 1210015   | 5       | 2,3           | 0,26 |
| 16        | 1210016   | 5       | 2,3           | 0,26 |
| 18        | 1210018   | 6       | 2,8           | 0,25 |
| 19        | 1210019   | 6       | 2,8           | 0,24 |
| 20        | 1210020   | 6       | 2,8           | 0,24 |
| 22        | 1210022   | 6       | 2,8           | 0,22 |
| 24        | 1210024   | 8       | 3,3           | 0,21 |
| 25        | 1210025   | 8       | 3,3           | 0,21 |
| 28        | 1210028   | 8       | 3,3           | 0,18 |
| 30        | 1210030   | 8       | 3,3           | 0,17 |
| 32        | 1210032   | 10      | 3,3           | 0,15 |

| Axel dim. | Artikelnr | Kilspår | Kilspårs djup |      |
|-----------|-----------|---------|---------------|------|
| d         |           | B       | T2            | Kg.  |
| 12        | 1215012   | 4       | 1,8           | 0,39 |
| 14        | 1215014   | 5       | 2,3           | 0,38 |
| 16        | 1215016   | 5       | 2,3           | 0,37 |
| 18        | 1215018   | 6       | 2,8           | 0,35 |
| 19        | 1215019   | 6       | 2,8           | 0,34 |
| 20        | 1215020   | 6       | 2,8           | 0,34 |
| 22        | 1215022   | 6       | 2,8           | 0,32 |
| 24        | 1215024   | 8       | 3,3           | 0,29 |
| 25        | 1215025   | 8       | 3,3           | 0,29 |
| 28        | 1215028   | 8       | 3,3           | 0,26 |
| 30        | 1215030   | 8       | 3,3           | 0,23 |
| 32        | 1215032   | 10      | 3,3           | 0,20 |



info@transflex.nu

# TAPER-LOCK BUSSNINGAR TAPER BUSHES

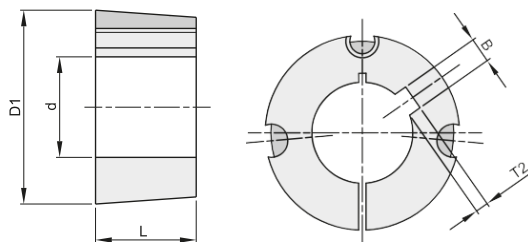

## BUSSNING 1610

D1 = 57  
L = 25,4

Skrubar = 3/8"  
Åtdragningsmoment = 20 Nm

## BUSSNING 1615

D1 = 57  
L = 38,1

Skrubar = 3/8"  
Åtdragningsmoment = 20 Nm

| Axel dim. | Artikelnr | Kilspår | Kilspårs<br>djup |      |
|-----------|-----------|---------|------------------|------|
| d         |           | B       | T2               | Kg.  |
| 12        | 1610012   | 4       | 1,8              | 0,41 |
| 14        | 1610014   | 5       | 2,3              | 0,41 |
| 15        | 1610015   | 5       | 2,3              | 0,40 |
| 16        | 1610016   | 5       | 2,3              | 0,40 |
| 18        | 1610018   | 6       | 2,8              | 0,39 |
| 19        | 1610019   | 6       | 2,8              | 0,38 |
| 20        | 1610020   | 6       | 2,8              | 0,38 |
| 22        | 1610022   | 6       | 2,8              | 0,37 |
| 24        | 1610024   | 8       | 3,3              | 0,36 |
| 25        | 1610025   | 8       | 3,3              | 0,35 |
| 28        | 1610028   | 8       | 3,3              | 0,32 |
| 30        | 1610030   | 8       | 3,3              | 0,30 |
| 32        | 1610032   | 10      | 3,3              | 0,29 |
| 35        | 1610035   | 10      | 3,3              | 0,26 |
| 38        | 1610038   | 10      | 3,3              | 0,23 |
| 40        | 1610040   | 12      | 3,3              | 0,21 |
| 42        | 1610042   | 12      | 3,3              | 0,19 |


| Axel dim. | Artikelnr | Kilspår | Kilspårs<br>djup |      |
|-----------|-----------|---------|------------------|------|
| d         |           | B       | T2               | Kg.  |
| 12        | 1615012   | 4       | 1,8              | 0,60 |
| 14        | 1615014   | 5       | 2,3              | 0,58 |
| 16        | 1615016   | 5       | 2,3              | 0,58 |
| 18        | 1615018   | 6       | 2,8              | 0,56 |
| 19        | 1615019   | 6       | 2,8              | 0,55 |
| 20        | 1615020   | 6       | 2,8              | 0,55 |
| 22        | 1615022   | 6       | 2,8              | 0,53 |
| 24        | 1615024   | 8       | 3,3              | 0,50 |
| 25        | 1615025   | 8       | 3,3              | 0,49 |
| 28        | 1615028   | 8       | 3,3              | 0,47 |
| 30        | 1615030   | 8       | 3,3              | 0,45 |
| 32        | 1615032   | 10      | 3,3              | 0,41 |
| 35        | 1615035   | 10      | 3,3              | 0,38 |
| 38        | 1615038   | 10      | 3,3              | 0,32 |
| 40        | 1615040   | 12      | 3,3              | 0,29 |
| 42        | 1615042   | 12      | 2,2              | 0,26 |



info@transflex.nu

# TAPER-LOCK BUSSNINGAR

## TAPER BUSHES

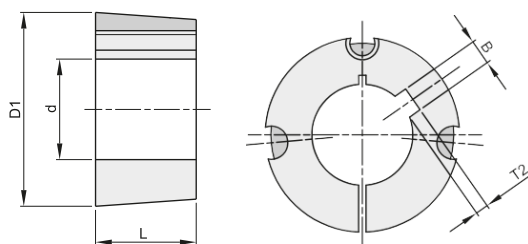

### BUSSNING 2012

D1 = 70  
L = 31,8

Skrivar = 7/16"  
Åtdragningsmoment = 31 Nm

### BUSSNING 2517

D1 = 85  
L = 44,5

Skrivar = 1/2"  
Åtdragningsmoment = 48 Nm


| Axel dim. | Artikelnr | Kilspår | Kilspårs djup |      |
|-----------|-----------|---------|---------------|------|
| d         |           | B       | T2            | Kg.  |
| 15        | 2012015   | 5       | 2,3           | 0,78 |
| 16        | 2012016   | 5       | 2,3           | 0,78 |
| 18        | 2012018   | 6       | 2,8           | 0,76 |
| 19        | 2012019   | 6       | 2,8           | 0,76 |
| 20        | 2012020   | 6       | 2,8           | 0,75 |
| 22        | 2012022   | 6       | 2,8           | 0,74 |
| 24        | 2012024   | 8       | 3,3           | 0,72 |
| 25        | 2012025   | 8       | 3,3           | 0,71 |
| 28        | 2012028   | 8       | 3,3           | 0,68 |
| 30        | 2012030   | 8       | 3,3           | 0,66 |
| 32        | 2012032   | 10      | 3,3           | 0,64 |
| 35        | 2012035   | 10      | 3,3           | 0,60 |
| 38        | 2012038   | 10      | 3,3           | 0,57 |
| 40        | 2012040   | 12      | 3,3           | 0,54 |
| 42        | 2012042   | 12      | 3,3           | 0,51 |
| 45        | 2012045   | 14      | 3,8           | 0,46 |
| 48        | 2012048   | 14      | 3,8           | 0,40 |
| 50        | 2012050   | 14      | 3,8           | 0,37 |

| Axel dim. | Artikelnr | Kilspår | Kilspårs djup |      |
|-----------|-----------|---------|---------------|------|
| d         |           | B       | T2            | Kg.  |
| 15        | 2517015   | 5       | 2,3           | 1,65 |
| 18        | 2517018   | 6       | 2,8           | 1,62 |
| 19        | 2517019   | 6       | 2,8           | 1,62 |
| 20        | 2517020   | 6       | 2,8           | 1,60 |
| 22        | 2517022   | 6       | 2,8           | 1,57 |
| 24        | 2517024   | 8       | 3,3           | 1,57 |
| 25        | 2517025   | 8       | 3,3           | 1,56 |
| 28        | 2517028   | 8       | 3,3           | 1,52 |
| 30        | 2517030   | 8       | 3,3           | 1,49 |
| 32        | 2517032   | 10      | 3,3           | 1,45 |
| 35        | 2517035   | 10      | 3,3           | 1,40 |
| 38        | 2517038   | 10      | 3,3           | 1,40 |
| 40        | 2517040   | 12      | 3,3           | 1,35 |
| 42        | 2517042   | 12      | 3,3           | 1,27 |
| 45        | 2514045   | 14      | 3,8           | 1,20 |
| 48        | 2517048   | 14      | 3,8           | 1,13 |
| 50        | 2517050   | 14      | 3,8           | 1,08 |
| 55        | 2517055   | 16      | 4,3           | 0,96 |
| 60        | 2517060   | 18      | 4,4           | 0,81 |
| 65        | 2517065   | 18      | 3,3           | 0,65 |



info@transflex.nu

# TAPER-LOCK BUSSNINGAR TAPER BUSHES

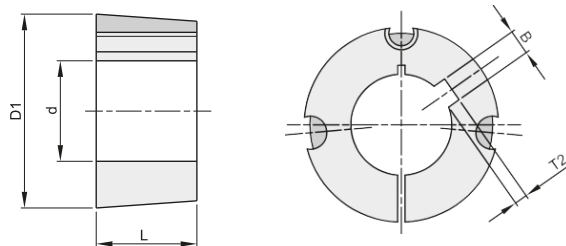

## BUSSNING 3020

D1 = 108  
L = 50,8

Skrivar = 5/8"  
Åtdragningsmoment = 90 Nm

## BUSSNING 3030

D1 = 108  
L = 76,2

Skrivar = 5/8"  
Åtdragningsmoment = 90 Nm

| Axel dim. | Artikelnr | Kilspår | Kilspårs<br>djup<br>T2 | Kg.  |
|-----------|-----------|---------|------------------------|------|
| d         |           | B       |                        |      |
| 20        | 3020020   | 6       | 2,8                    | 2,98 |
| 25        | 3020025   | 8       | 3,3                    | 2,91 |
| 28        | 3020028   | 8       | 3,3                    | 2,79 |
| 30        | 3020030   | 8       | 3,3                    | 2,84 |
| 32        | 3020032   | 10      | 3,3                    | 2,80 |
| 35        | 3020035   | 10      | 3,3                    | 2,75 |
| 38        | 3020038   | 10      | 3,3                    | 2,67 |
| 40        | 3020040   | 12      | 3,3                    | 2,64 |
| 42        | 3020042   | 12      | 3,3                    | 2,59 |
| 45        | 3020045   | 14      | 3,8                    | 2,52 |
| 48        | 3020048   | 14      | 3,8                    | 2,43 |
| 50        | 3020050   | 14      | 3,8                    | 2,37 |
| 55        | 3020055   | 16      | 4,3                    | 2,23 |
| 60        | 3020060   | 18      | 4,4                    | 2,07 |
| 65        | 3020065   | 18      | 4,4                    | 1,89 |
| 70        | 3020070   | 20      | 4,9                    | 1,69 |
| 75        | 3020075   | 20      | 4,9                    | 1,49 |


| Axel dim. | Artikelnr | Kilspår | Kilspårs<br>djup<br>T2 | Kg.  |
|-----------|-----------|---------|------------------------|------|
| d         |           | B       |                        |      |
| 30        | 3030030   | 8       | 3,3                    | 4,10 |
| 35        | 3030035   | 10      | 3,3                    | 3,95 |
| 38        | 3030038   | 10      | 3,3                    | 3,86 |
| 40        | 3030040   | 12      | 3,3                    | 3,82 |
| 42        | 3030042   | 12      | 3,3                    | 3,69 |
| 45        | 3030045   | 14      | 3,8                    | 3,55 |
| 48        | 3030048   | 14      | 3,8                    | 3,45 |
| 50        | 3030050   | 14      | 3,8                    | 3,42 |
| 55        | 3030055   | 16      | 4,3                    | 3,18 |
| 60        | 3030060   | 18      | 4,4                    | 2,95 |
| 65        | 3030065   | 18      | 4,4                    | 2,68 |
| 70        | 3030070   | 20      | 4,9                    | 2,38 |
| 75        | 3030075   | 20      | 4,9                    | 2,03 |



info@transflex.nu

# TAPER-LOCK BUSSNINGAR

## TAPER BUSHES

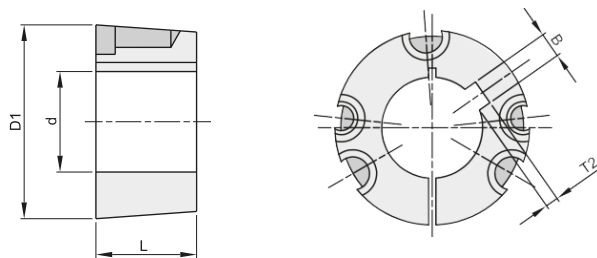

### BUSSNING 3525

D1 = 127  
L = 63,5

Skravar = 1/2"  
Åtdragningsmoment = 1120 Nm

### BUSSNING 3535

D1 = 127  
L = 89

Skravar = 1/2"  
Åtdragningsmoment = 112 Nm



| Axel dim. | Artikelnr | Kilspår | Kilspårs<br>djup<br>T2 | Kg.  |
|-----------|-----------|---------|------------------------|------|
| d         |           | B       |                        |      |
| 30        | 3525030   | 80      | 3,3                    | 5,02 |
| 35        | 3525035   | 10      | 3,3                    | 4,91 |
| 38        | 3525038   | 10      | 3,3                    | 4,85 |
| 40        | 3525040   | 12      | 3,3                    | 4,80 |
| 42        | 3525042   | 12      | 3,3                    | 4,71 |
| 45        | 3525045   | 14      | 3,8                    | 4,67 |
| 48        | 3525048   | 14      | 3,8                    | 4,55 |
| 50        | 3525050   | 14      | 3,8                    | 4,44 |
| 55        | 3525055   | 16      | 4,3                    | 4,29 |
| 60        | 3525060   | 18      | 4,4                    | 4,05 |
| 65        | 3525065   | 18      | 4,4                    | 3,88 |
| 70        | 3525070   | 20      | 4,9                    | 3,58 |
| 75        | 3525075   | 20      | 4,9                    | 3,37 |
| 80        | 3525080   | 22      | 5,4                    | 3,05 |
| 85        | 3525085   | 22      | 5,4                    | 2,77 |

| Axel dim. | Artikelnr | Kilspår | Kilspårs<br>djup<br>T2 | Kg.  |
|-----------|-----------|---------|------------------------|------|
| d         |           | B       |                        |      |
| 30        | 3535030   | 8       | 3,3                    | 6,84 |
| 35        | 3535035   | 10      | 3,3                    | 6,70 |
| 38        | 3535038   | 10      | 3,3                    | 6,53 |
| 40        | 3535040   | 12      | 3,3                    | 6,48 |
| 42        | 3535042   | 12      | 3,3                    | 6,40 |
| 45        | 3535045   | 14      | 3,8                    | 6,25 |
| 48        | 3535048   | 14      | 3,8                    | 6,17 |
| 50        | 3535050   | 14      | 3,8                    | 6,05 |
| 55        | 3535055   | 16      | 4,3                    | 5,81 |
| 60        | 3535060   | 18      | 4,4                    | 5,50 |
| 65        | 3535065   | 18      | 4,4                    | 5,20 |
| 70        | 3535070   | 20      | 4,9                    | 4,88 |
| 75        | 3535075   | 20      | 4,9                    | 4,46 |
| 80        | 3535080   | 22      | 5,4                    | 4,08 |
| 85        | 3535085   | 22      | 5,4                    | 3,67 |



info@transflex.nu

# TAPER-LOCK BUSSNINGAR TAPER BUSHES



## BUSSNING 4030

D1 = 146  
L = 76,2

Skrivar = 5/8"  
Åtdragningsmoment = 170 Nm

## BUSSNING 4040

D1 = 146  
L = 101,5

Skrivar = 5/8"  
Åtdragningsmoment = 170 Nm


| Axel dim. | Artikelnr | Kilspår | Kilspårs djup |      |
|-----------|-----------|---------|---------------|------|
| d         |           | B       | T2            | Kg.  |
| 40        | 4030040   | 12      | 3,3           | 6,65 |
| 42        | 4030042   | 12      | 3,3           | 6,58 |
| 45        | 4030044   | 14      | 3,8           | 6,58 |
| 48        | 4030046   | 14      | 3,8           | 6,55 |
| 50        | 4030048   | 14      | 3,8           | 6,40 |
| 55        | 4030050   | 16      | 4,3           | 6,40 |
| 60        | 4030052   | 18      | 4,4           | 6,35 |
| 65        | 4030054   | 18      | 4,4           | 6,35 |
| 70        | 4030056   | 20      | 4,9           | 6,30 |
| 75        | 4030058   | 20      | 4,9           | 6,30 |
| 80        | 4030060   | 22      | 5,4           | 6,10 |
| 85        | 4030062   | 22      | 5,4           | 6,10 |
| 90        | 4030064   | 25      | 5,4           | 5,90 |

| Axel dim. | Artikelnr | Kilspår | Kilspårs djup |      |
|-----------|-----------|---------|---------------|------|
| d         |           | B       | T2            | Kg.  |
| 45        | 4040045   | 14      | 3,8           | 9,86 |
| 48        | 4040048   | 14      | 3,8           | 9,66 |
| 50        | 4040050   | 14      | 3,8           | 9,48 |
| 55        | 4040055   | 16      | 4,3           | 9,27 |
| 60        | 4040060   | 18      | 4,4           | 8,93 |
| 65        | 4040065   | 18      | 4,4           | 8,65 |
| 70        | 4040070   | 20      | 4,9           | 8,17 |
| 75        | 4040075   | 20      | 4,9           | 7,78 |
| 80        | 4040080   | 22      | 5,4           | 7,35 |
| 85        | 4040085   | 22      | 5,4           | 6,89 |
| 90        | 4040090   | 25      | 5,4           | 6,36 |
| 95        | 4040095   | 25      | 5,4           | 5,94 |
| 100       | 4040100   | 28      | 6,4           | 5,27 |



info@transflex.nu

# TAPER-LOCK BUSSNINGAR TAPER BUSHES

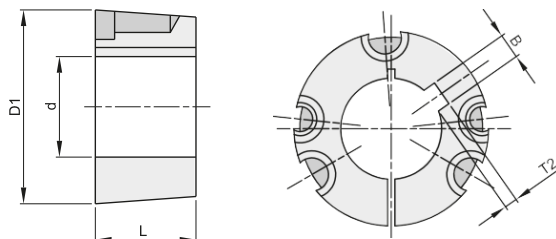

## BUSSNING 4535

D1 = 162  
L = 89

Skravar = 3/4"  
Åtdragningsmoment = 192 Nm

## BUSSNING 4545

D1 = 162  
L = 114,3

Skravar = 3/4"  
Åtdragningsmoment = 192 Nm


| Axel dim. | Artikelnr | Kilspår | Kilspårs<br>djup<br>T2 | Kg.   |
|-----------|-----------|---------|------------------------|-------|
| d         |           | B       |                        |       |
| 55        | 4535055   | 16      | 4,3                    | 10,55 |
| 60        | 4535060   | 18      | 4,4                    | 10,50 |
| 65        | 4535065   | 18      | 4,4                    | 10,40 |
| 70        | 4535070   | 20      | 4,9                    | 10,20 |
| 75        | 4535075   | 20      | 4,9                    | 9,95  |
| 80        | 4535080   | 22      | 5,4                    | 9,95  |
| 85        | 4535085   | 22      | 5,4                    | 9,90  |
| 90        | 4535090   | 25      | 5,4                    | 9,80  |
| 95        | 4535095   | 25      | 5,4                    | 9,75  |
| 100       | 4535100   | 28      | 6,4                    | 9,65  |
| 110       | 4535110   | 28      | 6,4                    | 9,55  |
| 120       | 4535120   | 32      | 7,4                    | 9,45  |

| Axel dim. | Artikelnr | Kilspår | Kilspårs<br>djup<br>T2 | Kg.   |
|-----------|-----------|---------|------------------------|-------|
| d         |           | B       |                        |       |
| 55        | 4545055   | 16      | 4,3                    | 13,15 |
| 60        | 4545060   | 18      | 4,4                    | 12,76 |
| 65        | 4545065   | 18      | 4,4                    | 12,38 |
| 70        | 4545070   | 20      | 4,9                    | 12,02 |
| 75        | 4545075   | 20      | 4,9                    | 11,57 |
| 80        | 4545080   | 22      | 5,4                    | 11,05 |
| 85        | 4545085   | 22      | 5,4                    | 10,46 |
| 90        | 4545090   | 25      | 5,4                    | 9,99  |
| 95        | 4545095   | 25      | 5,4                    | 9,42  |
| 100       | 4545100   | 28      | 6,4                    | 8,63  |
| 110       | 4545110   | 28      | 6,4                    | 7,37  |



info@transflex.nu

# TAPER-LOCK BUSSNINGAR TAPER BUSHES

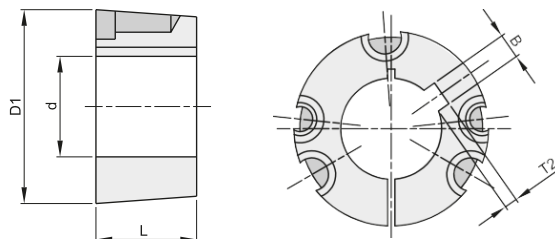

## BUSSNING 5040

D1 = 178  
L = 101,6

Skrubar = 7/8"  
Åtdragningsmoment = 271 Nm

## BUSSNING 5050

D1 = 178  
L = 127

Skrubar = 7/8"  
Åtdragningsmoment = 271 Nm

| Axel dim. | Artikelnr | Kilspår | Kilspårs djup |       |
|-----------|-----------|---------|---------------|-------|
| d         |           | B       | T2            | Kg.   |
| 70        | 5040070   | 20      | 4,9           | 11,90 |
| 75        | 5040075   | 20      | 4,9           | 11,90 |
| 80        | 5040080   | 22      | 5,4           | 11,30 |
| 85        | 5040085   | 22      | 5,4           | 11,30 |
| 90        | 5040090   | 25      | 5,4           | 10,60 |
| 100       | 5040100   | 28      | 6,4           | 10,60 |
| 110       | 5040110   | 28      | 6,4           | 10,00 |
| 120       | 5040120   | 32      | 7,4           | 9,70  |
| 125       | 5040125   | 32      | 7,4           | 9,70  |

| Axel dim. | Artikelnr | Kilspår | Kilspårs djup |       |
|-----------|-----------|---------|---------------|-------|
| d         |           | B       | T2            | Kg.   |
| 65        | 5050065   | 18      | 4,4           | 16,70 |
| 70        | 5050070   | 20      | 4,9           | 16,70 |
| 75        | 5050075   | 20      | 4,9           | 16,05 |
| 80        | 5050080   | 22      | 5,4           | 15,56 |
| 85        | 5050085   | 22      | 5,4           | 15,00 |
| 90        | 5050090   | 25      | 5,4           | 14,43 |
| 95        | 5050095   | 25      | 5,4           | 13,88 |
| 100       | 5050100   | 28      | 6,4           | 13,05 |
| 110       | 5050110   | 28      | 6,4           | 11,56 |
| 115       | 5050115   | 32      | 7,4           | 10,51 |
| 120       | 5050120   | 32      | 7,4           | 9,78  |
| 125       | 5050125   | 32      | 7,4           | 9,05  |



info@transflex.nu

# SKRUV TILL TAPER-LOCK BUSSNINGAR

## SCREWS FOR TAPER BUSHES

### Stoppskruv

Set screw with internal hexagon



### Insexskruv

Set head screw with internal hexagon



| Bussning | Artikelnr | Skruv | Åtdrags moment |       |
|----------|-----------|-------|----------------|-------|
|          |           |       | Nm             | Kg.   |
| 1008     | 1008S     | 1/4"  | 5,6            | 0,002 |
| 1108     | 1108S     | 1/4"  | 5,6            | 0,002 |
| 1210     | 1210S     | 3/8"  | 20,0           | 0,005 |
| 1215     | 1215S     | 3/8"  | 20,0           | 0,005 |
| 1610     | 1610S     | 3/8"  | 20,0           | 0,005 |
| 1615     | 1615S     | 3/8"  | 20,0           | 0,005 |
| 2012     | 2012S     | 7/16" | 31,0           | 0,012 |
| 2517     | 2517S     | 1/2"  | 48,0           | 0,017 |
| 3020     | 3020S     | 5/8"  | 90,0           | 0,032 |

| Bussning | Artikelnr | Skruv | Åtdrags moment |       |
|----------|-----------|-------|----------------|-------|
|          |           |       | Nm             | Kg.   |
| 3525     | 3525S     | 1/2"  | 112,0          | 0,050 |
| 3535     | 3535S     | 1/2"  | 112,0          | 0,050 |
| 4030     | 4030S     | 5/8"  | 170,0          | 0,090 |
| 4040     | 4040S     | 5/8"  | 170,0          | 0,090 |
| 4535     | 4535S     | 3/4"  | 192,0          | 0,146 |
| 4545     | 4545S     | 3/4"  | 192,0          | 0,146 |
| 5040     | 5040S     | 7/8"  | 271,0          | 0,228 |
| 5050     | 5050S     | 7/8"  | 271,0          | 0,228 |



info@transflex.nu