


SPÄNNRINGAR DELADE "TYP A" - SVART OXIDERADE

SHAFT COLLARS ONE SPLIT - BLACK OXIDE

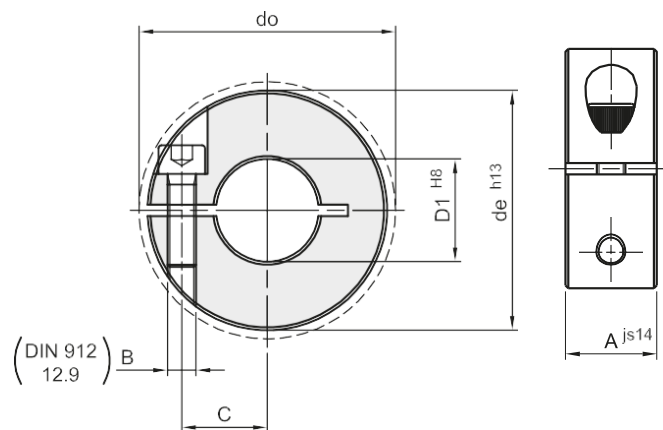

Material: Stål C45


Artikelnummer	D1	de	do	A	B	C	Kg.
	mm	mm	mm	mm	mm	mm	
WNS 4 A	4	16	20,7	9	M3 x 8	5,5	0,011
WNS 5 A	5	16	20,7	9	M3 x 8	5,5	0,010
WNS 6 A	6	16	20,7	9	M3 x 8	5,5	0,010
WNS 8 A	8	18	22,4	9	M3 x 8	6,5	0,012
WNS 10 A	10	24	26,0	9	M3 x 8	8,5	0,022
WNS 12 A	12	28	31,8	11	M4 x 12	10,0	0,038
WNS 14 A	14	30	33,9	11	M4 x 12	11,0	0,042
WNS 15 A	15	34	39,4	13	M5 x 14	12,5	0,065
WNS 16 A	16	34	39,4	13	M5 x 14	12,5	0,063
WNS 18 A	18	36	41,2	13	M5 x 14	13,5	0,069
WNS 19 A	19	40	46,4	15	M6 x 16	14,7	0,100
WNS 20 A	20	40	46,4	15	M6 x 16	14,7	0,097
WNS 22 A	22	42	48,1	15	M6 x 16	16,0	0,103
WNS 23 A	23	45	50,8	15	M6 x 16	17,5	0,122
WNS 24 A	24	45	50,8	15	M6 x 16	17,5	0,117
WNS 25 A	25	45	50,8	15	M6 x 16	17,5	0,114
WNS 26 A	26	48	53,7	15	M6 x 18	19,0	0,133
WNS 28 A	28	48	53,7	15	M6 x 18	19,0	0,123
WNS 30 A	30	54	58,6	15	M6 x 18	21,5	0,163
WNS 32 A	32	54	58,6	15	M6 x 18	21,5	0,156
WNS 35 A	35	57	61,6	15	M6 x 18	23,2	0,171
WNS 36 A	36	57	61,6	15	M6 x 18	23,2	0,163
WNS 38 A	38	60	65,0	15	M6 x 18	25,0	0,178
WNS 40 A	40	60	65,0	15	M6 x 18	25,0	0,163
WNS 45 A	45	73	79,4	19	M8 x 25	29,5	0,344
WNS 48 A	48	78	84,2	19	M8 x 25	32,0	0,392
WNS 50 A	50	78	84,2	19	M8 x 25	32,0	0,370
WNS 55 A	55	82	88,8	19	M8 x 25	34,2	0,380
WNS 60 A	60	88	94,0	19	M8 x 25	37,0	0,425
WNS 70 A	70	98	104,5	19	M8 x 25	42,0	0,480
WNS 80 A	80	108	113,8	19	M8 x 25	47,0	0,535



info@transflex.nu

SPÄNNRINGAR DELADE "TYP A" - ROSTFRITT STÅL

SHAFT COLLARS ONE SPLIT - STAINLESS STEEL

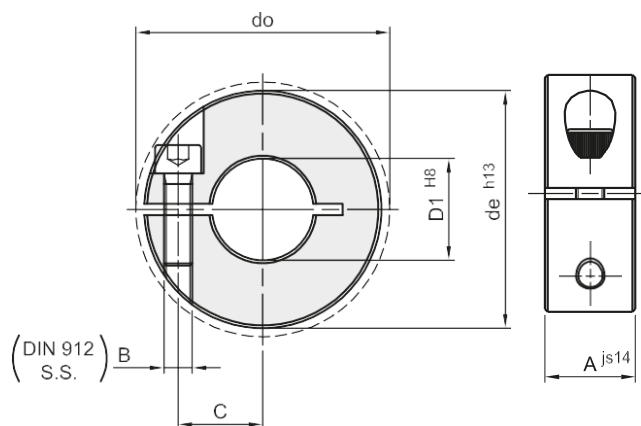

Material: Rostfritt AISI 304


Artikelnummer	D1	de	do	A	B	C	Kg.
	mm	mm	mm	mm	mm	mm	
WNS 4 AR	4	16	20,7	9	M3 x 8	5,5	0,011
WNS 5 AR	5	16	20,7	9	M3 x 8	5,5	0,010
WNS 6 AR	6	16	20,7	9	M3 x 8	5,5	0,010
WNS 8 AR	8	18	22,4	9	M3 x 8	6,5	0,012
WNS 10 AR	10	24	26,0	9	M3 x 8	8,5	0,022
WNS 12 AR	12	28	31,8	11	M4 x 12	10,0	0,038
WNS 14 AR	14	30	33,9	11	M4 x 12	11,0	0,042
WNS 15 AR	15	34	39,4	13	M5 x 14	12,5	0,065
WNS 16 AR	16	34	39,4	13	M5 x 14	12,5	0,063
WNS 18 AR	18	36	41,2	13	M5 x 14	13,5	0,069
WNS 19 AR	19	40	46,4	15	M6 x 16	14,7	0,100
WNS 20 AR	20	40	46,4	15	M6 x 16	14,7	0,097
WNS 22 AR	22	42	48,1	15	M6 x 16	16,0	0,103
WNS 23 AR	23	45	50,8	15	M6 x 16	17,5	0,122
WNS 24 AR	24	45	50,8	15	M6 x 16	17,5	0,117
WNS 25 AR	25	45	50,8	15	M6 x 16	17,5	0,114
WNS 26 AR	26	48	53,7	15	M6 x 18	19,0	0,133
WNS 28 AR	28	48	53,7	15	M6 x 18	19,0	0,123
WNS 30 AR	30	54	58,6	15	M6 x 18	21,5	0,163
WNS 32 AR	32	54	58,6	15	M6 x 18	21,5	0,156
WNS 35 AR	35	57	61,6	15	M6 x 18	23,2	0,171
WNS 36 AR	36	57	61,6	15	M6 x 18	23,2	0,163
WNS 38 AR	38	60	65,0	15	M6 x 18	25,0	0,178
WNS 40 AR	40	60	65,0	15	M6 x 18	25,0	0,163
WNS 45 AR	45	73	79,4	19	M8 x 25	29,5	0,344
WNS 48 AR	48	78	84,2	19	M8 x 25	32,0	0,392
WNS 50 AR	50	78	84,2	19	M8 x 25	32,0	0,370
WNS 55 AR	55	82	88,8	19	M8 x 25	34,2	0,380
WNS 60 AR	60	88	94,0	19	M8 x 25	37,0	0,425
WNS 70 AR	70	98	104,5	19	M8 x 25	42,0	0,480
WNS 80 AR	80	108	113,8	19	M8 x 25	47,0	0,535



info@transflex.nu

SPÄNNRINGAR DELADE "TYP B" - SVART OXIDERADE

SHAFT COLLARS TWO SPLIT - BLACK OXIDE

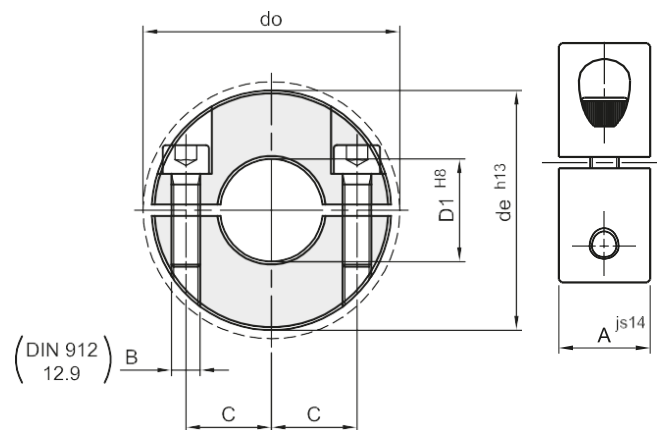

Material: Stål C45


Artikelnummer	D1 mm	de mm	do mm	A mm	B mm	C mm	Kg.
WNS 4 B	4	16	20,7	9	M3 x 8	5,5	0,011
WNS 5 B	5	16	20,7	9	M3 x 8	5,5	0,011
WNS 6 B	6	16	20,7	9	M3 x 8	5,5	0,010
WNS 8 B	8	18	22,4	9	M3 x 8	6,5	0,012
WNS 10 B	10	24	26,0	9	M3 x 8	8,5	0,024
WNS 12 B	12	28	31,8	11	M4 x 12	10,0	0,039
WNS 14 B	14	30	33,9	11	M4 x 12	11,0	0,043
WNS 15 B	15	34	39,4	13	M5 x 14	12,5	0,068
WNS 16 B	16	34	39,4	13	M5 x 14	12,5	0,065
WNS 18 B	18	36	41,2	13	M5 x 14	13,5	0,071
WNS 19 B	19	40	46,4	15	M6 x 16	14,7	0,104
WNS 20 B	20	40	46,4	15	M6 x 16	14,7	0,101
WNS 22 B	22	42	48,1	15	M6 x 16	16,0	0,107
WNS 23 B	23	45	50,8	15	M6 x 16	17,5	0,127
WNS 24 B	24	45	50,8	15	M6 x 16	17,5	0,122
WNS 25 B	25	45	50,8	15	M6 x 16	17,5	0,120
WNS 26 B	26	48	53,7	15	M6 x 18	19,0	0,139
WNS 28 B	28	48	53,7	15	M6 x 18	19,0	0,128
WNS 30 B	30	54	58,6	15	M6 x 18	21,5	0,171
WNS 32 B	32	54	58,6	15	M6 x 18	21,5	0,161
WNS 35 B	35	57	61,6	15	M6 x 18	23,2	0,172
WNS 36 B	36	57	61,6	15	M6 x 18	23,2	0,169
WNS 38 B	38	60	65,0	15	M6 x 18	25,0	0,183
WNS 40 B	40	60	65,0	15	M6 x 18	25,0	0,172
WNS 45 B	45	73	79,4	19	M8 x 25	29,5	0,360
WNS 48 B	48	78	84,2	19	M8 x 25	32,0	0,414
WNS 50 B	50	78	84,2	19	M8 x 25	32,0	0,386
WNS 55 B	55	82	88,8	19	M8 x 25	34,2	0,395
WNS 60 B	60	88	94,0	19	M8 x 25	37,0	0,440
WNS 70 B	70	98	104,5	19	M8 x 25	42,0	0,495
WNS 80 B	80	108	113,8	19	M8 x 25	47,0	0,550



info@transflex.nu

SPÄNNRINGAR DELADE "TYP B" - ROSTFRITT STÅL

SHAFT COLLARS TWO SPLIT - STAINLESS STEEL

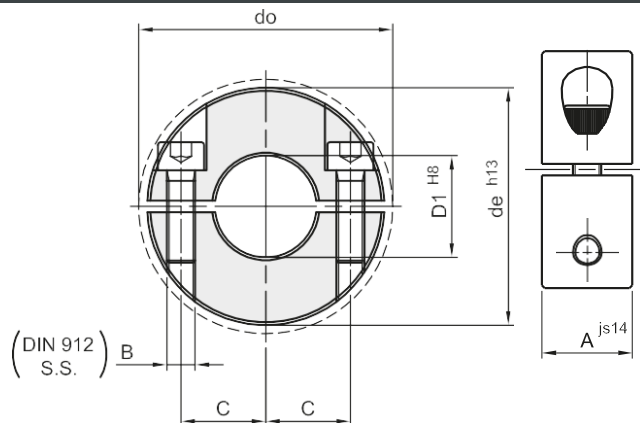

Material: Rostfritt AISI 304

Artikelnummer	D1	de	do	A	B	C	Kg.
	mm	mm	mm	mm	mm	mm	
WNS 4 BR	4	16	20,7	9	M3 x 8	5,5	0,011
WNS 5 BR	5	16	20,7	9	M3 x 8	5,5	0,011
WNS 6 BR	6	16	20,7	9	M3 x 8	5,5	0,010
WNS 8 BR	8	18	22,4	9	M3 x 8	6,5	0,012
WNS 10 BR	10	24	26,0	9	M3 x 8	8,5	0,024
WNS 12 BR	12	28	31,8	11	M4 x 12	10,0	0,039
WNS 14 BR	14	30	33,9	11	M4 x 12	11,0	0,043
WNS 15 BR	15	34	39,4	13	M5 x 14	12,5	0,068
WNS 16 BR	16	34	39,4	13	M5 x 14	12,5	0,065
WNS 18 BR	18	36	41,2	13	M5 x 14	13,5	0,071
WNS 19 BR	19	40	46,4	15	M6 x 16	14,7	0,104
WNS 20 BR	20	40	46,4	15	M6 x 16	14,7	0,101
WNS 22 BR	22	42	48,1	15	M6 x 16	16,0	0,107
WNS 23 BR	23	45	50,8	15	M6 x 16	17,5	0,127
WNS 24 BR	24	45	50,8	15	M6 x 16	17,5	0,122
WNS 25 BR	25	45	50,8	15	M6 x 16	17,5	0,120
WNS 26 BR	26	48	53,7	15	M6 x 18	19,0	0,139
WNS 28 BR	28	48	53,7	15	M6 x 18	19,0	0,128
WNS 30 BR	30	54	58,6	15	M6 x 18	21,5	0,171
WNS 32 BR	32	54	58,6	15	M6 x 18	21,5	0,161
WNS 35 BR	35	57	61,6	15	M6 x 18	23,2	0,172
WNS 36 BR	36	57	61,6	15	M6 x 18	23,2	0,169
WNS 38 BR	38	60	65,0	15	M6 x 18	25,0	0,183
WNS 40 BR	40	60	65,0	15	M6 x 18	25,0	0,172
WNS 45 BR	45	73	79,4	19	M8 x 25	29,5	0,360
WNS 48 BR	48	78	84,2	19	M8 x 25	32,0	0,414
WNS 50 BR	50	78	84,2	19	M8 x 25	32,0	0,386
WNS 55 BR	55	82	88,8	19	M8 x 25	34,2	0,395
WNS 60 BR	60	88	94,0	19	M8 x 25	37,0	0,440
WNS 70 BR	70	98	104,5	19	M8 x 25	42,0	0,495
WNS 80 BR	80	108	113,8	19	M8 x 25	47,0	0,550



info@transflex.nu