



TRANSPORTÖRKEDJOR "TYP M" - ISO/R 1977, SMS 2083, DIN 8167
CONVEYOR CHAINS "M SERIES" - ISO/R 1977, SMS 2083 DIN 8187


Typ A utan rulle

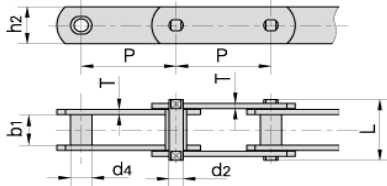


Typ B med skonulle




Typ C med löprulle



Typ D med flänsrulle



Typ E med löprulle och förhöjd länk

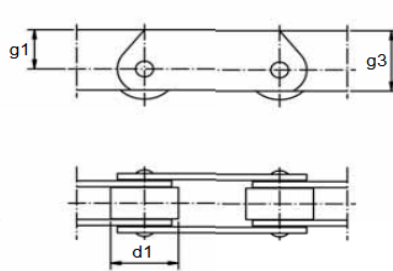

ISO	Delning									Rulle diameter			Bult diameter
	P									d1	d7	d5	d4
	mm	mm	mm	mm	mm	mm	mm	mm	mm	max	max	max	max
M20	*40	50	63	80	100	125	160	-	25	25	12,5	32	9
M28	*50	63	80	100	125	160	200	-	30	30	15	36	10
M40	63	80	100	125	160	200	250	-	36	36	18	42	12,5
M56	*63	80	100	125	160	200	250	-	42	42	21	50	15
M80	80	100	125	160	200	250	315	-	50	50	25	60	18
M112	*80	100	125	160	200	250	315	400	60	60	30	70	21
M160	*100	125	160	200	250	315	400	500	70	70	36	85	25
M224	*125	160	200	250	315	400	500	630	85	85	42	100	30
M315	*160	200	250	315	400	500	630	-	100	100	50	120	36
M450	200	250	315	400	500	630	800	-	120	120	60	140	42


ISO	Invändig bredd	Bult diameter	Bult längd	Länk	Länk	Brottgräns	
	b1	d2	L	h2	T	min	genomsnittlig
	min	max	max	max	max	kN	kN
M20	16	6	35	19,0	2,5	20	25
M28	18	7	40	21	3	28	35
M40	20	8,5	45	26,0	3,5	40	50
M56	24	10	52	31	4	56	70
M80	28	12	62	36	5	80	100
M112	32	15	73	41	6	112	140
M160	37	18	85	51	7	160	200
M224	43	21	98	62	8	224	280
M315	48	25	112	72	10	315	393,7
M450	56	30	135	82	12	450	562,5

Kedja M112, M160 och M224 kan levereras med grova länksidor.
Kedjorna kan levereras med svetsad bult och rulle.
Kedjorna kan levereras i andra material och med hårdare länkar.
Ytterligare delningar och dimensioner tillverkas vid behov.



info@transflex.nu

TRANSPORTÖRKEDJOR "TYP FV" - DIN 8165
CONVEYOR CHAINS "FV SERIES" - DIN 8165




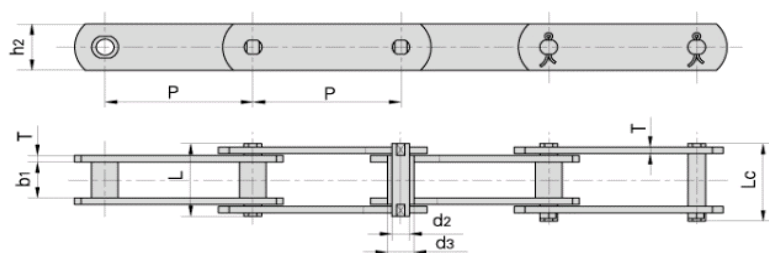


Typ A utan rulle

Typ B med skonulle

Typ C med löprulle

Typ D med flänsrulle



ISO	Delning												
	P							d1	d4	d5	d6	G	d3
	mm	mm	mm	mm	mm	mm	mm	max mm	max mm	max mm	max mm	mm	max mm
FV40	50	63	80	100	125	-	-	32	20	40,0	50	4	15
FV63	63	80	100	125	160	-	-	40	26	50	63	5	18
FV90	63	80	100	125	160	200	250	48	30	63,0	78	6,5	20
FV112	100	125	160	200	250	-	-	55	32	72	90	7,5	22
FV140	100	125	160	200	250	-	-	60	36	80,0	100	9	26
FV180	125	160	200	250	315	-	-	70	42	100	125	13	30
FV250	160	200	250	315	400	-	-	80	50	125,0	155	15	36
FV315	160	200	250	315	400	-	-	90	60	140	175	18	42

ISO	Invändig bredd		Bult diameter		Bult längd		Länk h2 max mm	Länk T max mm	Brottgräns	
	b1 min mm		d2 max mm		L min mm	Lc max mm			min kN	*min kN
FV40	18		10		36	39	25,0	3	40	47
FV63	22		12		45	48,5	30	4	63	75
FV90	25		14		53	56,5	35,0	5	90	115
FV112	30		16		62	66	40	6	112	170
FV140	35		18		67	71,5	45,0	6	140	180
FV180	45		20		86	92	50	8	180	250
FV250	55		26		97	103,5	60,0	8	250	300
FV315	65		30		113	126,5	70	10	315	480

* Högre brottlast med härdade länkar



info@transflex.nu