



KUGGREMSHJUL L FÖR BUSSNING TIMING BELT PULLEYS INCH PITCH FOR T/L


L 050
3/8" (9,525 mm)




10F



11



13



14


Artikelnummer	Typ	Material	Antal tänder	För bussning	Max axelhål	dp	de	Df	Dm	Di	F	L	R	Fläns nr.	Kg.
18 L 050 F	10F	Stål	18	1108	28	54,57	53,81	60	45		19,0	22,0	3	308	0,20
19 L 050 F	10F	Stål	19	1108	28	57,61	56,84	63	45		19,0	22,0	3	309	0,23
20 L 050 F	10F	Stål	20	1108	28	60,64	59,88	66	48		19,0	22,0	3	310	0,27
21 L 050 F	10F	Stål	21	1108	28	63,67	62,91	71	48		19,0	22,0	3	311	0,30
22 L 050 F	10F	Stål	22	1108	28	66,70	65,94	75	51		19,0	22,0	3	312	0,34
23 L 050 F	10F	Stål	23	1108	28	69,73	68,97	79	54		19,0	22,0	3	313	0,40
24 L 050 F	10F	Stål	24	1108	28	72,77	72,00	79	54		19,0	22,0	3	313	0,45
25 L 050 F	10F	Stål	25	1108	28	75,80	75,04	83	56		19,0	22,0	3	314	0,50
26 L 050 F	10F	Stål	26	1108	28	78,83	78,07	87	60		19,0	22,0	3	315	0,55
27 L 050 F	10F	Stål	27	1108	28	81,86	81,10	87	62		19,0	22,0	3	315	0,60
28 L 050 F	10F	Stål	28	1108	28	84,89	84,13	91	65		19,0	22,0	3	316	0,65
30 L 050 F	10F	Stål	30	1108	28	90,96	90,20	97	70		19,0	22,0	3	318	0,80
32 L 050 F	10F	Stål	32	1108	28	97,02	96,26	103	74		19,0	22,0	3	320	0,98
36 L 050 F	10F	Stål	36	1108	28	109,15	108,39	115	85		19,0	22,0	3	323	1,20
40 L 050 F	10F	Stål	40	1610	42	121,28	120,51	127	97		19,0	25,0	6	327	1,40
48 L 050 F	11F	Stål	48	1610	42	145,53	144,77	152	88	120	19,0	25,0	6	334	2,30
60 L 050 F	13	Stål	60	1610	42	181,91	181,15		92	166	19,0	25,0	3		2,20
72 L 050 F	14	Gjutjärn	72	1610	42	218,30	217,53		92	202	19,0	25,0	3		2,10
84 L 050 F	14	Gjutjärn	84	1610	42	254,68	253,90		92	236	19,0	25,0	3		2,46
96 L 050 F	14	Gjutjärn	96	2012	50	291,06	290,30		106	270	19,0	32,0	6,5		3,36
120 L 050 F	14	Gjutjärn	120	2012	50	363,83	363,07		106	343	19,0	32,0	6,5		4,44




info@transflex.nu

KUGGREMSHJUL L FÖR BUSSNING TIMING BELT PULLEYS INCH PITCH FOR T/L


L 075
3/8" (9,525 mm)




14




15F



21F



21



22



Artikelnummer	Typ	Material	Antal tänder	För bussning	Max axelhål	dp	de	Df	Dm	Di	F	L	R	Fläns nr.	Kg.
18 L 075 F	15F	Stål	18	1108	28	54,57	53,81	60			25,0	25,0		308	0,25
19 L 075 F	15F	Stål	19	1108	28	57,61	56,84	63			25,0	25,0		309	0,32
20 L 075 F	15F	Stål	20	1108	28	60,64	59,88	66			25,0	25,0		310	0,35
21 L 075 F	15F	Stål	21	1108	28	63,67	62,91	71			25,0	25,0		311	0,40
22 L 075 F	15F	Stål	22	1108	28	66,70	65,94	75			25,0	25,0		312	0,44
23 L 075 F	15F	Stål	23	1108	28	69,73	68,97	79			25,0	25,0		313	0,48
24 L 075 F	15F	Stål	24	1108	28	72,77	72,00	79			25,0	25,0		313	0,55
25 L 075 F	15F	Stål	25	1108	28	75,80	75,04	83			25,0	25,0		314	0,63
26 L 075 F	15F	Stål	26	1108	28	78,83	78,07	87			25,0	25,0		315	0,66
27 L 075 F	15F	Stål	27	1108	28	81,86	81,10	87			25,0	25,0		315	0,70
28 L 075 F	15F	Stål	28	1108	28	84,89	84,13	91			25,0	25,0		316	0,72
30 L 075 F	15F	Stål	30	1108	28	90,96	90,20	97			25,0	25,0		318	0,93
32 L 075 F	15F	Stål	32	1108	28	97,02	96,26	103			25,0	25,0		320	1,10
36 L 075 F	15F	Stål	36	1610	42	109,15	108,39	115			25,0	25,0		323	1,20
40 L 075 F	15F	Stål	40	1610	42	121,28	120,51	127			25,0	25,0		327	1,70
48 L 075 F	21F	Stål	48	1610	42	145,53	144,77	152	92	120	25,0	25,0		334	2,60
60 L 075 F	21	Stål	60	1610	42	181,91	181,15		92	166	25,0	25,0			3,00
72 L 075 F	22	Gjutjärn	72	1610	42	218,30	217,53		92	202	25,0	25,0			2,33
84 L 075 F	14	Gjutjärn	84	2012	50	254,68	253,90		106	236	25,0	32,0	3,5		3,55
96 L 075 F	14	Gjutjärn	96	2012	50	291,06	290,30		106	270	25,0	32,0	3,5		3,95
120 L 075 F	14	Gjutjärn	120	2012	50	363,83	363,07		106	343	25,0	32,0	3,5		5,61




info@transflex.nu

KUGGREMSHJUL L FÖR BUSSNING TIMING BELT PULLEYS INCH PITCH FOR T/L

L 100
3/8" (9,525 mm)

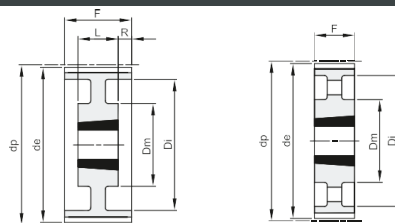

16F



17

19

22


Artikelnummer	Typ	Material	Antal tänder	För bussning	Max axelhål	dp	de	Df	Dm	Di	F	L	R	Fläns nr.	Kg.
18 L 100 F	16F	Stål	18	1108	28	54,57	53,81	60		38	31,0	22,0	9,0	308	0,20
19 L 100 F	16F	Stål	19	1108	28	57,61	56,84	63		38	31,0	22,0	9,0	309	0,32
20 L 100 F	16F	Stål	20	1108	28	60,64	59,88	66		45	31,0	22,0	9,0	310	0,41
21 L 100 F	16F	Stål	21	1108	28	63,67	62,91	71		45	31,0	22,0	9,0	311	0,45
22 L 100 F	16F	Stål	22	1108	28	66,70	65,94	75		48	31,0	22,0	9,0	312	0,47
23 L 100 F	16F	Stål	23	1108	28	69,73	68,97	79		52	32,0	22,0	10,0	313	0,50
24 L 100 F	16F	Stål	24	1108	28	72,77	72,00	79		52	32,0	22,0	10,0	313	0,64
25 L 100 F	16F	Stål	25	1108	28	75,80	75,04	83		54	32,0	22,0	10,0	314	0,68
26 L 100 F	16F	Stål	26	1108	28	78,83	78,07	87		60	32,0	22,0	10,0	315	0,70
27 L 100 F	16F	Stål	27	1108	28	81,86	81,10	87		60	32,0	22,0	10,0	315	0,83
28 L 100 F	16F	Stål	28	1108	28	84,89	84,13	91		65	32,0	22,0	10,0	316	0,85
30 L 100 F	16F	Stål	30	1210	32	90,96	90,20	97		71	32,0	25,0	7,0	318	0,90
32 L 100 F	16F	Stål	32	1210	32	97,02	96,26	103		75	32,0	25,0	7,0	320	1,05
36 L 100 F	16F	Stål	36	1610	42	109,15	108,39	115		86	32,0	25,0	7,0	323	1,40
40 L 100 F	16F	Stål	40	1610	42	121,28	120,51	127		96	32,0	25,0	7,0	327	1,65
48 L 100 F	17F	Stål	48	1610	42	145,53	144,77	152	92	120	32,0	25,0	7,0	334	2,80
60 L 100 F	19	Stål	60	1610	42	181,91	181,15		92	166	32,0	25,0	3,5		2,70
72 L 100 F	22	Gjutjärn	72	2012	50	218,30	217,53		106	202	32,0	32,0			2,96
84 L 100 F	22	Gjutjärn	84	2012	50	254,68	253,90		106	236	32,0	32,0			3,87
96 L 100 F	22	Gjutjärn	96	2012	50	291,06	290,30		106	270	32,0	32,0			4,64
120 L 100 F	22	Gjutjärn	120	2012	50	363,83	363,07		106	343	32,0	32,0			6,37



info@transflex.nu

KUGGREMSHJUL H FÖR BUSSNING TIMING BELT PULLEYS INCH PITCH FOR T/L

H 100
1/2" (12,7 mm)

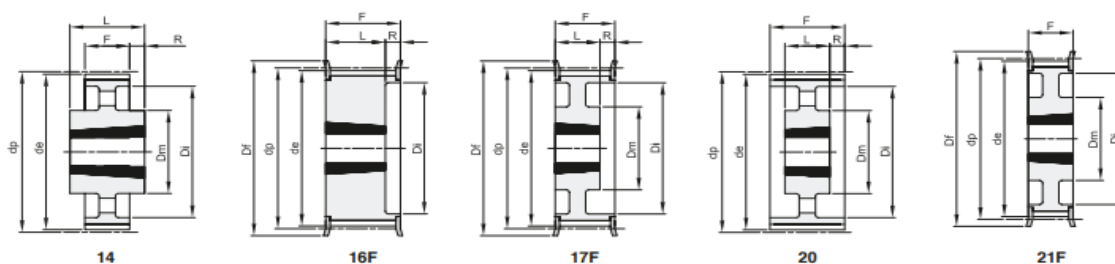


Artikelnummer	Typ	Material	Antal tänder	För bussning	Max axelhål	dp	de	Df	Dm	Di	F	L	R	Fläns nr.	Kg.
16 H 100 F	16F	Stål	16	1108	28	64,68	63,31	71		45	31,0	22,0	9,0	311	0,42
18 H 100 F	16F	Stål	18	1210	32	72,77	71,39	79		52	31,0	25,0	6,0	313	0,49
19 H 100 F	16F	Stål	19	1210	32	76,81	75,44	83		56	31,0	25,0	6,0	314	0,62
20 H 100 F	16F	Stål	20	1210	32	80,85	79,48	87		60	31,0	25,0	6,0	315	0,73
21 H 100 F	16F	Stål	21	1210	32	84,89	83,52	91		64	32,0	25,0	7,0	316	0,80
22 H 100 F	16F	Stål	22	1210	32	88,94	87,56	93		67	32,0	25,0	7,0	317	0,94
23 H 100 F	16F	Stål	23	1610	42	92,98	91,61	97		70	32,0	25,0	7,0	318	0,97
24 H 100 F	16F	Stål	24	1610	42	97,02	95,65	103		73,5	32,0	25,0	7,0	320	1,05
25 H 100 F	16F	Stål	25	1610	42	101,06	99,69	106		77	32,0	25,0	7,0	321	1,10
26 H 100 F	16F	Stål	26	1610	42	105,11	103,73	111		82	32,0	25,0	7,0	322	1,20
27 H 100 F	16F	Stål	27	1610	42	109,15	107,78	115		85	32,0	25,0	7,0	323	1,35
28 H 100 F	16F	Stål	28	1610	42	113,19	111,82	119		90,5	32,0	25,0	7,0	325	1,50
30 H 100 F	16F	Stål	30	1610	42	121,28	119,90	127		98	32,0	25,0	7,0	327	1,78
32 H 100 F	17F	Stål	32	1610	42	129,36	127,99	135	90	106	32,0	25,0	7,0	328	2,05
36 H 100 F	17F	Stål	36	1610	42	145,53	144,16	152	92	121	32,0	25,0	7,0	334	2,80
40 H 100 F	17F	Stål	40	1610	42	161,70	160,33	168	92	138	32,0	25,0	7,0	338	3,65
44 H 100 F	21F	Stål	44	2012	50	177,87	176,50	184	106	152	32,0	32,0		339	3,86
48 H 100 F	21F	Stål	48	2012	50	194,04	192,67	200	106	169	32,0	32,0		342	4,20
60 H 100 F	20	Gjutjärn	60	2012	50	242,55	241,18		106	223	34,0	32,0	1,0		3,76
72 H 100 F	20	Gjutjärn	72	2012	50	291,06	289,69		106	270	34,0	32,0	1,0		4,88
84 H 100 F	20	Gjutjärn	84	2012	50	339,57	338,20		106	318	34,0	32,0	1,0		6,12
96 H 100 F	14	Gjutjärn	96	2517	60	388,08	386,71		119	366	34,0	45,0	5,5		7,95
120 H 100 F	14	Gjutjärn	120	2517	60	485,10	483,73		119	462	34,0	45,0	5,5		10,05




info@transflex.nu

KUGGREMSHJUL H FÖR BUSSNING TIMING BELT PULLEYS INCH PITCH FOR T/L


H 150 1/2" (12,7 mm)



16F



17F




20

Artikelnummer	Typ	Material	Antal tänder	För bussning	Max axelhål	dp	de	Df	Dm	Di	F	L	R	Fläns nr.	Kg.
18 H 150 F	16F	Stål	18	1210	32	72,77	71,39	79		52	45,0	25,0	20,0	313	0,60
19 H 150 F	16F	Stål	19	1210	32	76,81	75,44	83		56	45,0	25,0	20,0	314	0,72
20 H 150 F	16F	Stål	20	1210	32	80,85	79,48	87		60	45,0	25,0	20,0	315	0,83
21 H 150 F	16F	Stål	21	1210	32	84,89	83,52	91		64	45,0	25,0	20,0	316	1,00
22 H 150 F	16F	Stål	22	1210	32	88,94	87,56	93		67	45,0	25,0	20,0	317	1,25
23 H 150 F	16F	Stål	23	1610	42	92,98	91,61	97		70	45,0	25,0	20,0	318	1,05
24 H 150 F	16F	Stål	24	1610	42	97,02	95,65	103		73,5	45,0	25,0	20,0	320	1,10
25 H 150 F	16F	Stål	25	1610	42	101,06	99,69	106		77	45,0	25,0	20,0	321	1,30
26 H 150 F	16F	Stål	26	1610	42	105,11	103,73	111		82	45,0	25,0	20,0	322	1,42
27 H 150 F	16F	Stål	27	1610	42	109,15	107,78	115		85	45,0	25,0	20,0	323	1,65
28 H 150 F	16F	Stål	28	1610	42	113,19	111,82	119		90,5	45,0	25,0	20,0	325	1,88
30 H 150 F	16F	Stål	30	1610	42	121,28	119,90	127		98	45,0	25,0	20,0	327	2,05
32 H 150 F	17F	Stål	32	1610	42	129,36	127,99	135	90	106	45,0	25,0	20,0	328	2,35
36 H 150 F	17F	Stål	36	1610	42	145,53	144,16	152	92	121	45,0	25,0	20,0	334	3,20
40 H 150 F	17F	Stål	40	1610	42	161,70	160,33	168	92	138	45,0	25,0	20,0	338	4,10
44 H 150 F	17F	Stål	44	2012	50	177,87	176,50	184	106	152	45,0	32,0	13,0	339	4,50
48 H 150 F	17F	Stål	48	2012	50	194,04	192,67	200	106	169	45,0	32,0	13,0	342	4,80
60 H 150 F	20	Gjutjärn	60	2012	50	242,55	241,18		106	223	46,0	32,0	7,0		4,51
72 H 150 F	20	Gjutjärn	72	2012	50	291,06	289,69		106	270	46,0	32,0	7,0		6,16
84 H 150 F	20	Gjutjärn	84	2012	50	339,57	338,20		106	320	46,0	32,0	7,0		7,40
96 H 150 F	20	Gjutjärn	96	2517	60	388,08	386,71		119	366	46,0	45,0	0,5		9,87
120 H 150 F	20	Gjutjärn	120	2517	60	485,10	483,73		119	462	46,0	45,0	0,5		13,50




KUGGREMSHJUL H FÖR BUSSNING TIMING BELT PULLEYS INCH PITCH FOR T/L


H 200 1/2" (12,7 mm)



16F



17F




20

Artikelnummer	Typ	Material	Antal tänder	För bussning	Max axelhål	dp	de	Df	Dm	Di	F	L	R	Fläns nr.	Kg.
18 H 200 F	16F	Stål	18	1210	32	72,77	71,39	79		52	58,0	25,0	33,0	313	0,84
19 H 200 F	16F	Stål	19	1210	32	76,81	75,44	83		56	58,0	25,0	33,0	314	0,96
20 H 200 F	16F	Stål	20	1610	42	80,85	79,48	87		60	58,0	25,0	33,0	315	0,93
21 H 200 F	16F	Stål	21	1610	42	84,89	83,52	91		64	58,0	25,0	33,0	316	1,07
22 H 200 F	16F	Stål	22	1610	42	88,94	87,56	93		67	58,0	25,0	33,0	317	1,25
23 H 200 F	16F	Stål	23	1610	42	92,98	91,61	97		70	58,0	25,0	33,0	318	1,40
24 H 200 F	16F	Stål	24	1610	42	97,02	95,65	103		73,5	58,0	25,0	33,0	320	1,55
25 H 200 F	16F	Stål	25	1610	42	101,06	99,69	106		77	58,0	25,0	33,0	321	1,71
26 H 200 F	16F	Stål	26	1610	42	105,11	103,73	111		82	58,0	25,0	33,0	322	1,84
27 H 200 F	16F	Stål	27	1610	42	109,15	107,78	115		85	58,0	25,0	33,0	323	2,06
28 H 200 F	16F	Stål	28	1610	42	113,19	111,82	119		90,5	58,0	25,0	33,0	325	2,17
30 H 200 F	16F	Stål	30	1610	42	121,28	119,90	127		98	58,0	25,0	33,0	327	2,60
32 H 200 F	16F	Stål	32	2012	50	129,36	127,99	135		106	58,0	32,0	26,0	328	2,95
36 H 200 F	17F	Stål	36	2012	50	145,53	144,16	152	102	121	58,0	32,0	26,0	334	3,62
40 H 200 F	17F	Stål	40	2012	50	161,70	160,33	168	106	138	58,0	32,0	26,0	338	4,33
44 H 200 F	17F	Stål	44	2012	50	177,87	176,50	184	106	152	58,0	32,0	26,0	339	5,33
48 H 200 F	17F	Stål	48	2517	60	194,04	192,67	200	119	169	58,0	45,0	13,0	342	6,47
60 H 200 F	20	Gjutjärn	60	2517	60	242,55	241,18		119	223	60,0	45,0	7,5		5,86
72 H 200 F	20	Gjutjärn	72	2517	60	291,06	289,69		119	270	60,0	45,0	7,5		7,42
84 H 200 F	20	Gjutjärn	84	2517	60	339,57	338,20		119	320	60,0	45,0	7,5		8,73
96 H 200 F	20	Gjutjärn	96	2517	60	388,08	386,71		119	366	60,0	45,0	7,5		10,83
120 H 200 F	20	Gjutjärn	120	2517	60	485,10	483,73		119	462	60,0	45,0	7,5		14,95




KUGGREMSHJUL H FÖR BUSSNING TIMING BELT PULLEYS INCH PITCH FOR T/L


H 300 1/2" (12,7 mm)



18F



19F



20

Artikelnummer	Typ	Material	Antal tänder	För bussning	Max axelhål	dp	de	Df	Dm	Di	F	L	R	Fläns nr.	Kg.
20 H 300 F	18F	Stål	20	1615	42	80,85	79,48	87		64,5	84,0	38,0	23,0	315	1,22
21 H 300 F	18F	Stål	21	1615	42	84,89	83,52	91		65	84,0	38,0	23,0	316	1,52
22 H 300 F	18F	Stål	22	1615	42	88,94	87,56	93		67	84,0	38,0	23,0	317	1,80
23 H 300 F	18F	Stål	23	1615	42	92,98	91,61	97		70	84,0	38,0	23,0	318	2,04
24 H 300 F	18F	Stål	24	1615	42	97,02	95,65	103		73,5	84,0	38,0	23,0	320	2,29
25 H 300 F	18F	Stål	25	1615	42	101,06	99,69	106		77	84,0	38,0	23,0	321	2,54
26 H 300 F	18F	Stål	26	1615	42	105,11	103,73	111		82	84,0	38,0	23,0	322	2,73
27 H 300 F	18F	Stål	27	2012	50	109,15	107,78	115		85	84,0	32,0	26,0	323	2,54
28 H 300 F	18F	Stål	28	2012	50	113,19	111,82	119		90,5	84,0	32,0	26,0	325	2,68
30 H 300 F	18F	Stål	30	2012	50	121,28	119,90	127		98	84,0	32,0	26,0	327	3,21
32 H 300 F	18F	Stål	32	2517	60	129,36	127,99	135		106	84,0	45,0	19,5	328	3,58
36 H 300 F	18F	Stål	36	2517	60	145,53	144,16	152		121	84,0	45,0	19,5	334	4,99
40 H 300 F	18F	Stål	40	2517	60	161,70	160,33	168		138	84,0	45,0	19,5	338	6,50
44 H 300 F	19F	Stål	44	2517	60	177,87	176,50	184	119	152	86,0	45,0	20,5	339	7,55
48 H 300 F	19F	Stål	48	2517	60	194,04	192,67	200	119	169	86,0	45,0	20,5	342	8,66
60 H 300 F	20	Gjutjärn	60	2517	60	242,55	241,18		119	223	86,0	45,0	20,5		7,42
72 H 300 F	20	Gjutjärn	72	2517	60	291,06	289,69		119	270	86,0	45,0	20,5		9,33
84 H 300 F	20	Gjutjärn	84	2517	60	339,57	338,20		119	320	86,0	45,0	20,5		11,19
96 H 300 F	20	Gjutjärn	96	3030	75	388,08	386,71		150	362	86,0	76,0	5,0		17,96
120 H 300 F	20	Gjutjärn	120	3030	75	485,10	483,73		150	460	86,0	76,0	5,0		22,23

