


KILREMSSKIVOR FÖR TAPER LOCK BUSSNING

V-BELTS PULLEYS FOR TAPER BUSH

SPA - 1

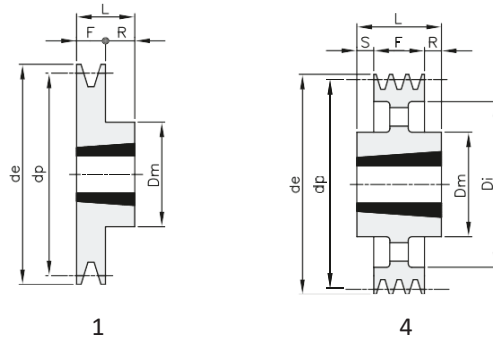


Material: Gjutjärn EN-GJL-200

Benämning	Artikelnr.	Antal spår	dp	de	Typ	För Bussning	Axelhål max	Dm	Di	F	L	R	S	Kg.
SPA 63x1	1SPA63	1	63	68,5	1	1008	25	56		20	22	2		0,26
SPA 67x1	1SPA67	1	67	72,5	1	1108	28	56		20	22	2		0,29
SPA 71x1	1SPA71	1	71	76,5	1	1108	28	60		20	22	2		0,35
SPA 75x1	1SPA75	1	75	80,5	1	1108	28	60		20	22	2		0,41
SPA 80x1	1SPA80	1	80	85,5	1	1210	32	75		20	25	5		0,47
SPA 85x1	1SPA85	1	85	90,5	1	1210	32	80		20	25	5		0,58
SPA 90x1	1SPA90	1	90	95,5	1	1210	32	80		20	25	5		0,67
SPA 95x1	1SPA95	1	95	100,5	1	1210	32	85		20	25	5		0,80
SPA 100x1	1SPA100	1	100	105,5	1	1610	42	85		20	25	5		0,80
SPA 106x1	1SPA106	1	106	111,5	1	1610	42	92		20	25	5		0,90
SPA 112x1	1SPA112	1	112	117,5	1	1610	42	92		20	25	5		1,05
SPA 118x1	1SPA118	1	118	123,5	1	1610	42	92		20	25	5		1,22
SPA 125x1	1SPA125	1	125	130,5	1	1610	42	92		20	25	5		1,40
SPA 132x1	1SPA132	1	132	137,5	1	1610	42	92		20	25	5		1,60
SPA 140x1	1SPA140	1	140	145,5	1	1610	42	92		20	25	5		1,80
SPA 150x1	1SPA150	1	150	155,5	1	1610	42	92		20	25	5		2,14
SPA 160x1	1SPA160	1	160	165,5	1	1610	42	92		20	25	5		2,50
SPA 170x1	1SPA170	1	170	175,5	1	1610	42	92		20	25	5		2,51
SPA 180x1	1SPA180	1	180	185,5	4	1610	42	92	145	20	25	5		2,18
SPA 190x1	1SPA190	1	190	195,5	4	1610	42	92	156	20	25	5		2,50
SPA 200x1	1SPA200	1	200	205,5	4	2012	50	108	165	20	32	12		3,00
SPA 212x1	1SPA212	1	212	217,5	4	2012	50	110	177	20	32	12		3,20
SPA 224x1	1SPA224	1	224	229,5	4	2012	50	112	189	20	32	12		3,30
SPA 236x1	1SPA236	1	236	241,5	4	2012	50	112	202	20	32	12		3,50
SPA 250x1	1SPA250	1	250	255,5	4	2012	50	112	215	20	32	6	6	3,75
SPA 280x1	1SPA280	1	280	285,5	4	2012	50	112	245	20	32	12		4,10
SPA 300x1	1SPA300	1	300	305,5	4	2012	50	112	265	20	32	12		4,70
SPA 315x1	1SPA315	1	315	320,5	4	2012	50	112	280	20	32	12		4,75
SPA 355x1	1SPA355	1	355	360,5	4	2012	50	112	320	20	32	12		5,60
SPA 400x1	1SPA400	1	400	405,5	4	2012	50	112	365	20	32	12		6,48
SPA 450x1	1SPA450	1	450	455,5	4	2012	50	112	415	20	32	12		7,50
SPA 500x1	1SPA500	1	500	505,5	4	2517	65	124	465	20	45	25		9,60
SPA 630x1	1SPA630	1	630	635,5	4	2517	65	124	595	20	45	25		12,50

KILREMSSKIVOR FÖR TAPER LOCK BUSSNING

V-BELTS PULLEYS FOR TAPER BUSH

SPA - 2

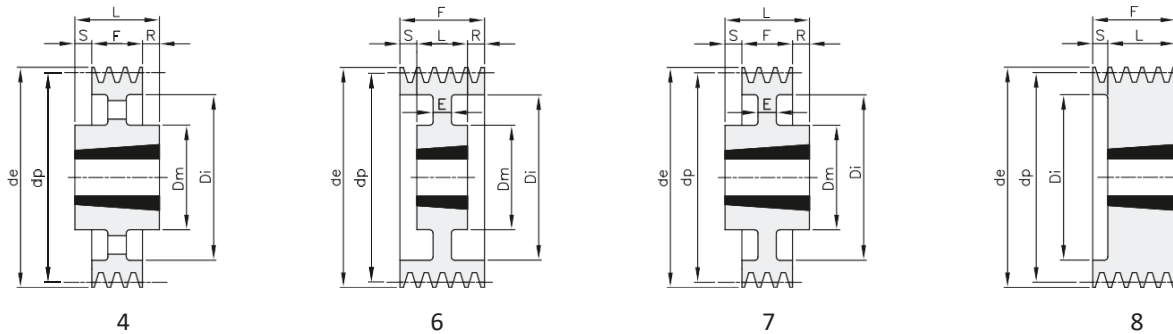

Material: Gjutjärn EN-GJL-200 (*=C45)

Benämning		Artikelnr.	Antal spår	dp	de	Typ	För bussning	Axelhål max	Dm	Di	E	F	L	R	S	Kg.
*SPA	63x2	2SPA63	2	63	68,5	8	1008	25		32,5		35	22		13	0,43
SPA	67x2	2SPA67	2	67	72,5	8	1108	28		37		35	22		13	0,45
SPA	71x2	2SPA71	2	71	76,5	8	1108	28		40		35	22		13	0,51
SPA	75x2	2SPA75	2	75	80,5	8	1108	28		44		35	22		13	0,59
SPA	80x2	2SPA80	2	80	85,5	8	1210	32		50		35	25		10	0,60
SPA	85x2	2SPA85	2	85	90,5	8	1210	32		55		35	25		10	0,70
SPA	90x2	2SPA90	2	90	95,5	8	1610	42		59		35	25		10	0,70
SPA	95x2	2SPA95	2	95	100,5	8	1610	42		63		35	25		10	0,85
SPA	100x2	2SPA100	2	100	105,5	8	1610	42		66		35	25		10	1,00
SPA	106x2	2SPA106	2	106	111,5	8	1610	42		72		35	25		10	1,17
SPA	112x2	2SPA112	2	112	117,5	8	1610	42		78		35	25		10	1,37
SPA	118x2	2SPA118	2	118	123,5	8	1610	42		84		35	25		10	1,56
SPA	125x2	2SPA125	2	125	130,5	8	1610	42		91		35	25		10	1,85
SPA	132x2	2SPA132	2	132	137,5	8	2012	50		98		35	32		3	2,08
SPA	140x2	2SPA140	2	140	145,5	8	2012	50		106		35	32		3	2,45
SPA	150x2	2SPA150	2	150	155,5	8	2012	50		116		35	32		3	2,95
SPA	160x2	2SPA160	2	160	165,5	8	2012	50		125		35	32		3	3,50
SPA	170x2	2SPA170	2	170	175,5	8	2012	50		135		35	32		3	4,10
SPA	180x2	2SPA180	2	180	185,5	6	2012	50	108	146	10	35	32	1,5	1,5	3,53
SPA	190x2	2SPA190	2	190	195,5	6	2012	50	108	156	10	35	32	1,5	1,5	3,82
SPA	200x2	2SPA200	2	200	205,5	7	2517	65	123	163	10	35	45	5	5	4,73
SPA	212x2	2SPA212	2	212	217,5	4	2517	65	123	177		35	45	5	5	4,98
SPA	224x2	2SPA224	2	224	229,5	4	2517	65	124	189		35	45	10		5,20
SPA	236x2	2SPA236	2	236	241,5	4	2517	65	124	202		35	45	10		5,37
SPA	250x2	2SPA250	2	250	255,5	4	2517	65	124	215		35	45	5	5	5,77
SPA	280x2	2SPA280	2	280	285,5	4	2517	65	124	245		35	45	10		6,52
SPA	300x2	2SPA300	2	300	305,5	4	2517	65	124	265		35	45	10		7,00
SPA	315x2	2SPA315	2	315	320,5	4	2517	65	124	280		35	45	10		7,14
SPA	355x2	2SPA355	2	355	360,5	4	2517	65	124	320		35	45	10		8,70
SPA	400x2	2SPA400	2	400	405,5	4	2517	65	124	365		35	45	10		10,20
SPA	450x2	2SPA450	2	450	455,5	4	2517	65	124	415		35	45	10		11,54
SPA	500x2	2SPA500	2	500	505,5	4	2517	65	124	465		35	45	10		18,98
SPA	630x2	2SPA630	2	630	635,5	4	3020	75	159	595		35	51	8	8	19,50




info@transflex.nu

KILREMSSKIVOR FÖR TAPER LOCK BUSSNING

V-BELTS PULLEYS FOR TAPER BUSH

SPA - 3

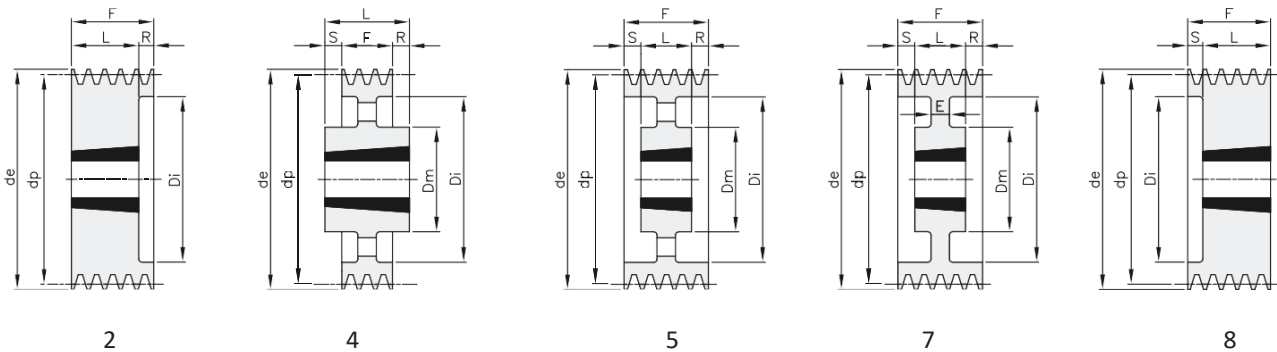

Material: Gjutjärn EN-GJL-200

Antal spår																
Benämning		Artikelnr.	Antal spår	dp	de	Typ	För bussning	Axelhål max	Dm	Di	E	F	L	R	S	Kg.
SPA	71x3	3SPA71	3	71	76,5	8	1108	28		40		50	22		28	0,70
SPA	75x3	3SPA75	3	75	80,5	8	1108	28		44		50	22		28	0,80
SPA	80x3	3SPA80	3	80	85,5	8	1210	32		50		50	25		25	0,80
SPA	85x3	3SPA85	3	85	90,5	8	1210	32		55		50	25		25	0,93
SPA	90x3	3SPA90	3	90	95,5	8	1610	42		59		50	25		25	0,94
SPA	95x3	3SPA95	3	95	100,5	8	1610	42		63		50	25		25	1,13
SPA	100x3	3SPA100	3	100	105,5	2	1610	42		66		50	25	25		1,32
SPA	106x3	3SPA106	3	106	111,5	2	1610	42		72		50	25	25		1,52
SPA	112x3	3SPA112	3	112	117,5	8	2012	50		78		50	32		18	1,57
SPA	118x3	3SPA118	3	118	123,5	2	2012	50		84		50	32	18		1,83
SPA	125x3	3SPA125	3	125	130,5	2	2012	50		91		50	32	18		2,20
SPA	132x3	3SPA132	3	132	137,5	2	2012	50		98		50	32	18		2,54
SPA	140x3	3SPA140	3	140	145,5	8	2517	65		106		50	45		5	2,85
SPA	150x3	3SPA150	3	150	155,5	8	2517	65		116		50	45		5	3,57
SPA	160x3	3SPA160	3	160	165,5	8	2517	65		125		50	45		5	4,33
SPA	170x3	3SPA170	3	170	175,5	8	2517	65		135		50	45		5	5,13
SPA	180x3	3SPA180	3	180	185,5	8	2517	65		146		50	45		5	6,00
SPA	190x3	3SPA190	3	190	195,5	8	2517	65		156		50	45		5	6,80
SPA	200x3	3SPA200	3	200	205,5	6	2517	65	123	165	20	50	45	2,5	2,5	6,17
SPA	212x3	3SPA212	3	212	217,5	5	2517	65	123	177		50	45	2,5	2,5	6,00
SPA	224x3	3SPA224	3	224	229,5	5	2517	65	124	189		50	45	2,5	2,5	6,42
SPA	236x3	3SPA236	3	236	241,5	5	2517	65	124	202		50	45	2,5	2,5	6,67
SPA	250x3	3SPA250	3	250	255,5	5	2517	65	124	215		50	45	2,5	2,5	7,08
SPA	280x3	3SPA280	3	280	285,5	5	2517	65	124	245		50	45	2,5	2,5	8,18
SPA	300x3	3SPA300	3	300	305,5	4	3020	75	159	265		50	51	0,5	0,5	10,00
SPA	315x3	3SPA315	3	315	320,5	4	3020	75	159	280		50	51	0,5	0,5	11,10
SPA	355x3	3SPA355	3	355	360,5	4	3020	75	159	320		50	51	0,5	0,5	12,50
SPA	400x3	3SPA400	3	400	405,5	4	3020	75	159	365		50	51	1		14,45
SPA	450x3	3SPA450	3	450	455,5	4	3020	75	159	415	50		51	1		16,88
SPA	500x3	3SPA500	3	500	505,5	4	3020	75	159	465	50		51	1		19,50
SPA	560x3	3SPA560	3	560	565,5	4	3020	75	159	525	50		51	1		20,70
SPA	630x3	3SPA630	3	630	635,5	4	3020	75	159	595	50		51	1		23,70
SPA	800x3	3SPA800	3	800	805,5	4	3535	90	175	765	50		89	19,5	19,5	39,00
SPA	1000x3	3SPA1000	3	1000	1005,5	4	3535	90	175	965	50		89	19,5	19,5	49,00




info@transflex.nu

KILREMSSKIVOR FÖR TAPER LOCK BUSSNING

V-BELTS PULLEYS FOR TAPER BUSH

SPA - 4

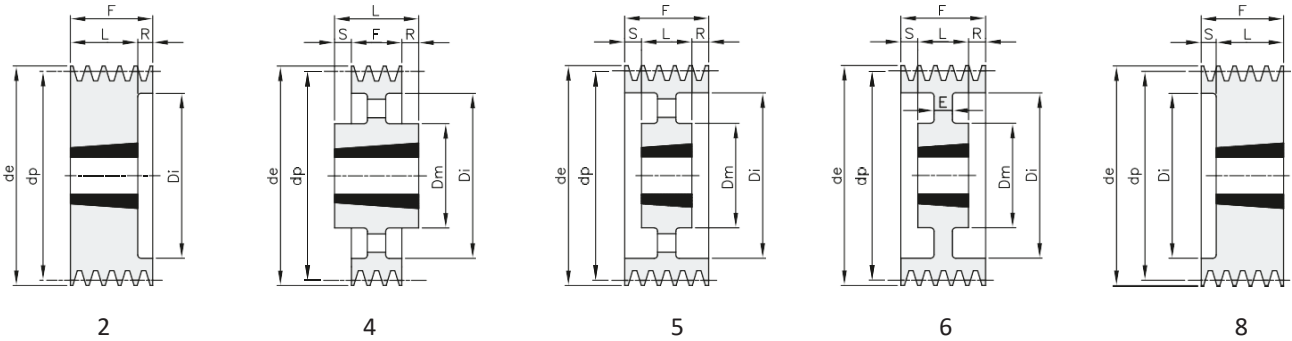

Material: Gjutjärn EN-GJL-200

Benämning		Artikelnr.	Antal spår	dp	de	Typ	För Busning	Axelhål max	Dm	Di	E	F	L	R	S	Kg.
SPA	90x4	4SPA90	4	90	95,5	8	1615	42		59		65	38		27	1,26
SPA	95x4	4SPA95	4	95	100,5	8	1615	42		63		65	38		27	1,48
SPA	100x4	4SPA100	4	100	105,5	2	1615	42		66		65	38	27		1,76
SPA	106x4	4SPA106	4	106	111,5	8	2012	50		72		65	32		33	1,66
SPA	112x4	4SPA112	4	112	117,5	8	2012	50		78		65	32		33	1,92
SPA	118x4	4SPA118	4	118	123,5	2	2012	50		84		65	32	33		2,22
SPA	125x4	4SPA125	4	125	130,5	2	2012	50		91		65	32	33		2,65
SPA	132x4	4SPA132	4	132	137,5	2	2517	65		98		65	45	20		2,80
SPA	140x4	4SPA140	4	140	145,5	2	2517	65		106		65	45	20		3,36
SPA	150x4	4SPA150	4	150	155,5	2	2517	65		116		65	45	20		4,11
SPA	160x4	4SPA160	4	160	165,5	2	2517	65		125		65	45	20		4,92
SPA	170x4	4SPA170	4	170	175,5	2	2517	65		135		65	45	20		5,75
SPA	180x4	4SPA180	4	180	185,5	2	2517	65		146		65	45	20		6,64
SPA	190x4	4SPA190	4	190	195,5	2	2517	65		156		65	45	20		7,62
SPA	200x4	4SPA200	4	200	205,5	2	3020	75		165		65	51	14		8,12
SPA	212x4	4SPA212	4	212	217,5	2	3020	75		177		65	51	14		9,58
SPA	224x4	4SPA224	4	224	229,5	2	3020	75		189		65	51	14		11,10
SPA	236x4	4SPA236	4	236	241,5	6	3020	75	159	202	20	65	51	14		9,90
SPA	250x4	4SPA250	4	250	255,5	5	3020	75	159	215		65	51	7	7	10,13
SPA	280x4	4SPA280	4	280	285,5	5	3020	75	159	245		65	51	7	7	11,22
SPA	300x4	4SPA300	4	300	305,5	5	3020	75	159	265		65	51	7	7	12,20
SPA	315x4	4SPA315	4	315	320,5	5	3020	75	159	280		65	51	7	7	13,00
SPA	355x4	4SPA355	4	355	360,5	5	3020	75	159	320		65	51	7	7	14,60
SPA	400x4	4SPA400	4	400	405,5	5	3020	75	159	365		65	51	7	7	17,10
SPA	450x4	4SPA450	4	450	455,5	5	3020	75	159	415		65	51	7	7	19,70
SPA	500x4	4SPA500	4	500	505,5	5	3020	75	159	465		65	51	7	7	21,70
SPA	560x4	4SPA560	4	560	565,5	4	3535	90	175	525		65	89	12	12	28,00
SPA	630x4	4SPA630	4	630	635,5	4	3535	90	175	595		65	89	12	12	33,00
SPA	800x4	4SPA800	4	800	805,5	4	3535	90	175	765		65	89	12	12	45,00
SPA	1000x4	4SPA1000	4	1000	1005,5	4	4040	100	210	965		65	102	18,5	18,5	64,00




info@transflex.nu

KILREMSSKIVOR FÖR TAPER LOCK BUSSNING

V-BELTS PULLEYS FOR TL

SPA - 5

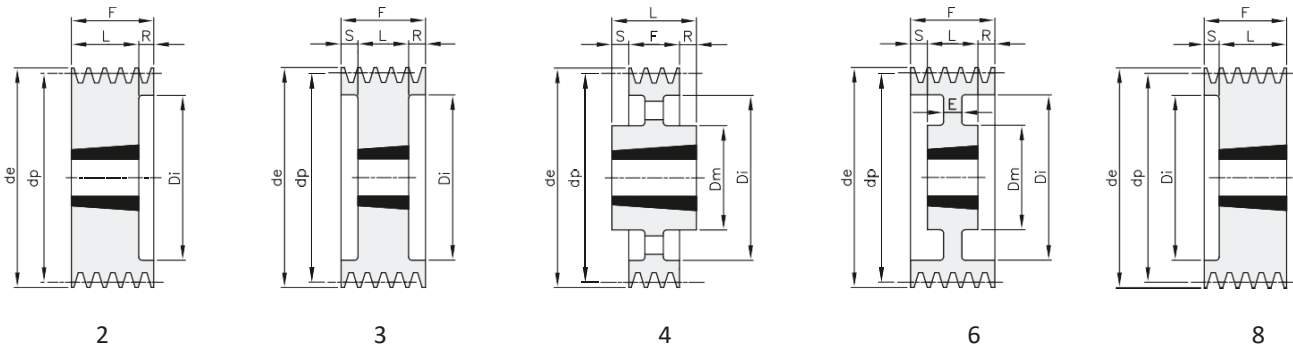

Material: Gjutjärn EN-GJL-200

Benämning	Artikelnr.	Antal spår	dp	de	Typ	För bussning	Axelhål max	Dm	Di	E	F	L	R	S	Kg.
SPA 100x5	5SPA100	5	100	105,5	2	1615	42		66	80	38	42			2,10
SPA 106x5	5SPA106	5	106	111,5	8	2012	50		72	80	32		48		2,30
SPA 112x5	5SPA112	5	112	117,5	8	2012	50		78	80	32		48		2,50
SPA 118x5	5SPA118	5	118	123,5	2	2012	50		84	80	32	48			2,80
SPA 125x5	5SPA125	5	125	130,5	3	2012	50		91	80	32	24	24		3,00
SPA 132x5	5SPA132	5	132	137,5	3	2517	65		98	80	45	17,5	17,5		3,50
SPA 140x5	5SPA140	5	140	145,5	3	2517	65		106	80	45	17,5	17,5		3,90
SPA 150x5	5SPA150	5	150	155,5	3	2517	65		116	80	45	17,5	17,5		4,40
SPA 160x5	5SPA160	5	160	165,5	3	2517	65		125	80	45	17,5	17,5		5,70
SPA 170x5	5SPA170	5	170	175,5	3	2517	65		135	80	45	17,5	17,5		6,30
SPA 180x5	5SPA180	5	180	185,5	3	3020	75		146	80	51	14,5	14,5		6,90
SPA 190x5	5SPA190	5	190	195,5	2	3020	75		156	80	51	29			7,70
SPA 200x5	5SPA200	5	200	205,5	3	3020	75		168	80	51	14,5	14,5		9,00
SPA 212x5	5SPA212	5	212	217,5	2	3020	75		177	80	51	29			9,80
SPA 224x5	5SPA224	5	224	229,5	2	3020	75		189	80	51	29			10,20
SPA 236x5	5SPA236	5	236	241,5	2	3020	75		202	80	51	29			11,20
SPA 250x5	5SPA250	5	250	255,5	6	3020	75	159	215	20	80	51	14,5	14,5	12,40
SPA 280x5	5SPA280	5	280	285,5	4	3535	90	175	245	80	89	4,5	4,5		15,00
SPA 300x5	5SPA300	5	300	305,5	4	3535	90	175	265	80	89	4,5	4,5		16,50
SPA 315x5	5SPA315	5	315	320,5	4	3535	90	175	280	80	89	4,5	4,5		18,10
SPA 355x5	5SPA355	5	355	360,5	4	3535	90	175	320	80	89	4,5	4,5		19,70
SPA 400x5	5SPA400	5	400	405,5	4	3535	90	175	365	80	89	4,5	4,5		22,50
SPA 450x5	5SPA450	5	450	455,5	4	3535	90	175	415	80	89	4,5	4,5		25,20
SPA 500x5	5SPA500	5	500	505,5	4	3535	90	175	465	80	89	4,5	4,5		29,60
SPA 560x5	5SPA560	5	560	565,5	4	3535	90	175	525	80	89	4,5	4,5		32,00
SPA 630x5	5SPA630	5	630	635,5	4	3535	90	175	595	80	89	4,5	4,5		36,00
SPA 800x5	5SPA800	5	800	805,5	4	4040	100	210	765	80	102	11	11		50,00
SPA 1000x5	5SPA1000	5	1000	1005,5	4	4545	110	242	965	80	114	17,0	17,0		77,00




info@transflex.nu

KILREMSSKIVOR FÖR TAPER LOCK BUSSNING

V-BELTS PULLEYS FOR TAPER BUSH

SPA - 6

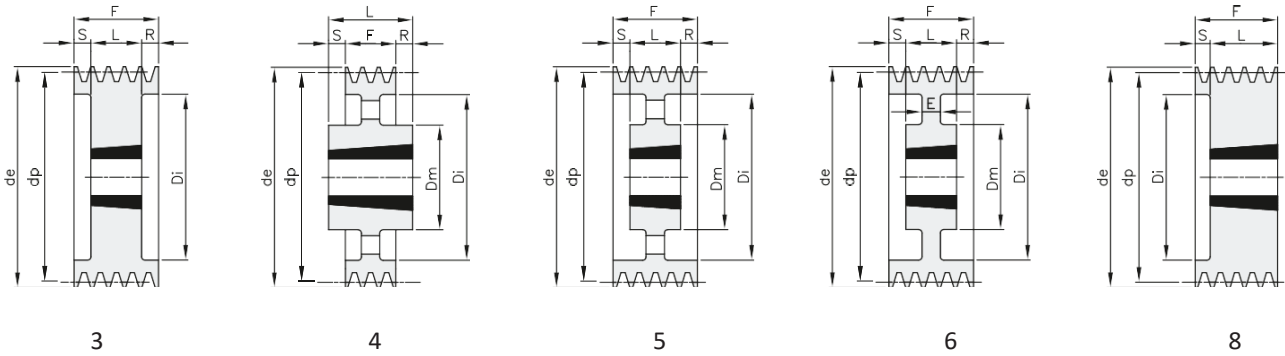

Material: Gjutjärn EN-GJL-200

Benämning		Artikelnr.	Antal spår	dp	de	Typ	För Bussning	Axelhål max	Dm	Di	E	F	L	R	S	Kg.
SPA	100x6	6SPA100	6	100	105,5	3	1610	42		66		95	25	40	30	2,50
SPA	106x6	6SPA106	6	106	111,5	8	2012	50		72		95	32		63	2,60
SPA	112x6	6SPA112	6	112	117,5	8	2012	50		78		95	32		63	2,90
SPA	118x6	6SPA118	6	118	123,5	8	2012	50		84		95	32		63	3,30
SPA	125x6	6SPA125	6	125	130,5	3	2012	50		91		95	32	31,5	31,5	3,50
SPA	132x6	6SPA132	6	132	137,5	3	2517	65		98		95	45	25	25	3,80
SPA	140x6	6SPA140	6	140	145,5	3	2517	65		106		95	45	25	25	4,10
SPA	150x6	6SPA150	6	150	155,5	3	2517	65		116		95	45	25	25	4,90
SPA	160x6	6SPA160	6	160	165,5	3	2517	65		125		95	45	25	25	5,70
SPA	180x6	6SPA180	6	180	185,5	3	3020	75		146		95	51	22	22	8,50
SPA	200x6	6SPA200	6	200	205,5	3	3020	75		165		95	51	22	22	11,00
SPA	224x6	6SPA224	6	224	229,5	3	3020	75		189		95	51	22	22	13,40
SPA	236x6	6SPA236	6	236	241,5	3	3020	75		202		95	51	22	22	14,90
SPA	250x6	6SPA250	6	250	255,5	6	3020	75	155	215	20	95	51	22	22	16,40
SPA	280x6	6SPA280	6	280	285,5	5	3535	90	175	245		95	89	3	3	17,30
SPA	315x6	6SPA315	6	315	320,5	5	3535	90	175	280		95	89	3	3	21,70
SPA	355x6	6SPA355	6	355	360,5	5	3535	90	175	320		95	89	3	3	22,00
SPA	400x6	6SPA400	6	400	405,5	5	3535	90	175	365		95	89	3	3	24,60
SPA	450x6	6SPA450	6	450	455,5	5	3535	90	175	415		95	89	3	3	27,40
SPA	500x6	6SPA500	6	500	505,5	5	3535	90	175	465		95	89	3	3	30,00
SPA	560x6	6SPA560	6	560	565,5	5	3535	90	175	525		95	89	3	3	33,00
SPA	630x6	6SPA630	6	630	635,5	4	4040	100	210	595		95	102	3,5	3,5	46,50
SPA	800x6	6SPA800	6	800	805,5	4	4040	100	210	765		95	102	3,5	3,5	59,00
SPA	1000x6	6SPA1000	6	1000	1005,5	4	4545	110	242	965	95		114	9,5	9,5	87,00



info@transflex.nu