


INSATSLAGER UC - I ROSTFRITT

INSERT BALL BEARING UC - IN STAINLESS STEEL

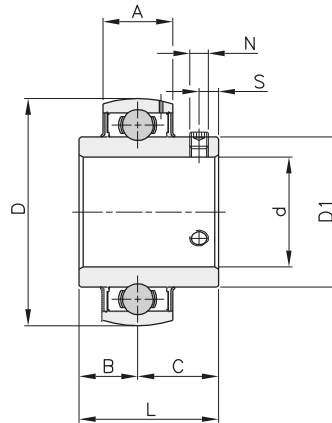

Material: AISI 440



Lager	d	D	D1	L	A	B	C	S	N	Kg.
UC 205 SS	20	47	29	31	17	12,7	18	4,5	M6 x 1	0,16
UC 205 SS	25	52	34	34	17	14,3	19,7	5	M6 x 1	0,20
UC 206 SS	30	62	40,5	38,1	19	15,9	22,2	5	M6 x 1	0,32
UC 207 SS	35	72	48	42,9	20	17,5	25,4	6	M8 x 1	0,48
UC 208 SS	40	80	53	49,2	21	19	30,2	8	M8 x 1	0,65
UC 209 SS	45	85	57,3	49,2	22	19	30,2	8	M8 x 1	0,70
UC 210 SS	50	90	63	51,6	23	19	32,6	9	M10 x 1	0,79



info@transflex.nu

FLÄNSLAGERHUS UCF - I ROSTFRITT

BEARING UCF - IN STAINLESS STEEL

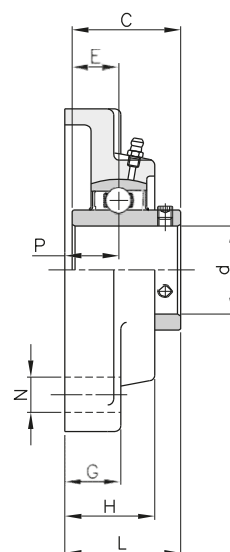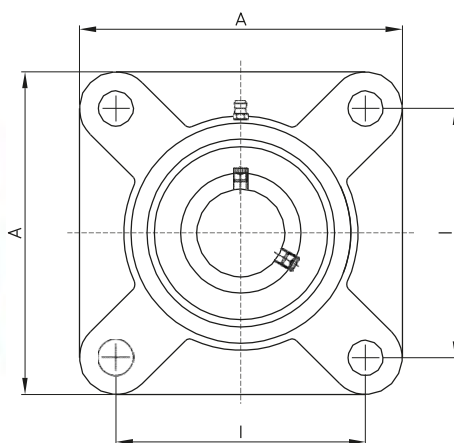

Material:

Hus: AISI 304

Lager: AISI 440


Lager	d	A	I	P	G	H	I	L	C	E	Kg.
UCF 201 SS	12	86	64	15	12	25,5	12	33,3	31	12,7	0,64
UCF 202 SS	15	86	64	15	12	25,5	12	33,3	31	12,7	0,63
UCF 203 SS	17	86	64	15	12	25,5	12	33,3	31	12,7	0,61
UCF 204 SS	20	86	64	15	12	25,5	12	33,3	31	12,7	0,59
UCF 205 SS	25	95	70	16	14	27	12	35,7	34	14,3	0,82
UCF 206 SS	30	108	83	18	14	31	12	40,2	38,1	15,9	1,10
UCF 207 SS	35	117	92	19	16	34	14	44,4	42,9	17,5	1,50
UCF 208 SS	40	130	102	21	16	36	16	51,2	49,2	19	1,90
UCF 209 SS	45	137	105	22	18	38	16	52,2	49,2	19	2,30
UCF 210 SS	50	143	111	22	18	40	16	54,6	51,6	19	2,50



info@transflex.nu

FLÄNSLAGERHUS UCF - I GJUTJÄRN

BEARING UCF - IN CAST IRON


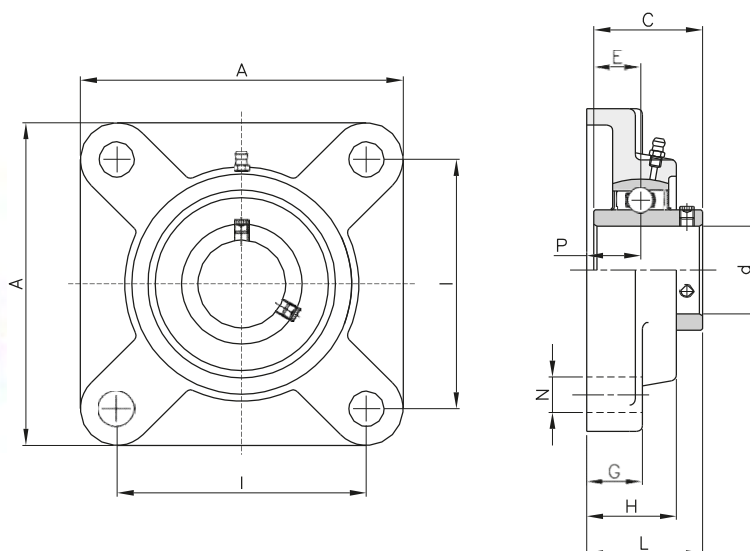


Lager	d	A	I	P	G	H	N	L	C	E	Kg.
UCF 202	15	76	54	15	11	25,4	12	33,3	27,4	11,5	0,59
UCF 203	17	76	54	15	11	25,4	12	33,3	27,4	11,5	0,59
UCF 204	20	86	64	15	11	25,4	12	33,3	31	12,7	0,62
UCF 205	25	95	70	16	13	27	12	35,7	34	14,3	0,83
UCF 206	30	108	83	18	13	31	12	40,2	38,1	15,9	1,10
UCF 207	35	117	92	19	15	34	14	44,4	42,9	17,5	1,50
UCF 208	40	130	102	21	15	36	16	51,2	49,2	19	1,90
UCF 209	45	137	105	22	16	38	16	52,2	49,2	19	2,20
UCF 210	50	143	111	22	16	40	16	54,6	51,6	22,2	2,50
UCF 211	55	162	130	25	18	43	19	58,4	55,6	25,4	3,40
UCF 212	60	175	143	29	22	48	19	68,7	65,1	25,4	4,20
UCF 213	65	187	149	30	22	50	19	69,7	65,1	30,2	5,20
UCF 214	70	193	152	31	22	54	19	75,4	74,6	33,3	5,90
UCF 215	75	200	159	34	22	56	19	78,5	77,8	33,3	6,40
UCF 216	80	208	165	34	22	58	23	83,3	82,6	33,3	7,30
UCF 217	85	220	175	36	24	63	23	87,6	85,7	34,1	8,90



FLÄNSLAGERHUS UCFA - I GJUTJÄRN

BEARING UCFA - IN CAST IRON

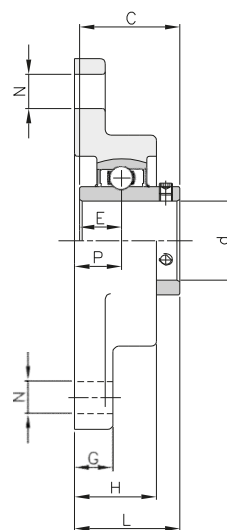
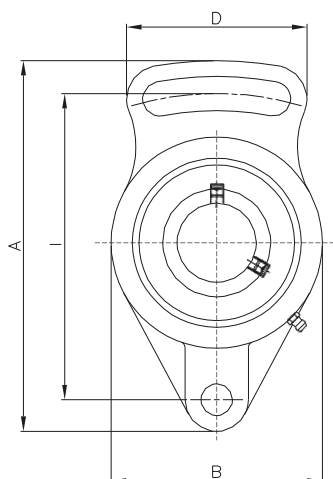


Lager	d	A	I	P	G	H	N	B	L	D	C	E	Kg.
UCFA 204	20	98	78	15	12	25,5	10	60	33,3	50	31	12,7	0,46
UCFA 205	25	124	98	16	14	27	13	70	36,8	65	34,1	14,3	0,66
UCFA 206	30	141	115	18	14	31	13	83	40,2	72	38,1	15,9	0,93
UCFA 207	35	155	128	19	16	34	15	96	44,4	82	42,9	17,5	1,46
UCFA 208	40	171	142	21	16	38	15	105	51,2	87	49,2	19	1,78
UCFA 209	45	179	146	22	18	40	17	111	52,2	90	49,2	19	2,03
UCFA 210	50	189	155	22	18	40	17	116	54,6	94	51,6	19	2,23



FLÄNSLAGERHUS UCFB - I GJUTJÄRN

BEARING UCFB - IN CAST IRON

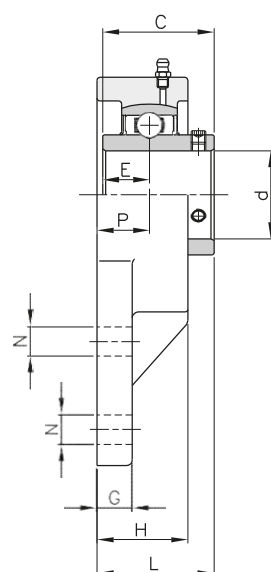
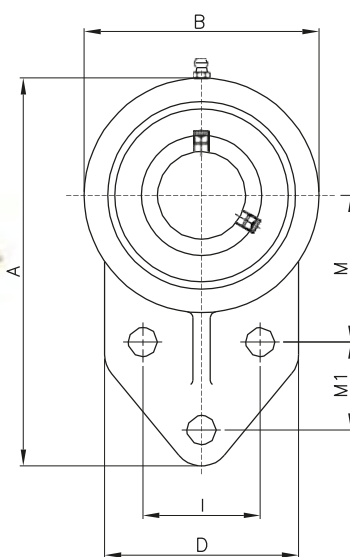


Lager	d	A	B	D	H	N	G	M	M1	I	P	L	C	E	Kg.
UCFB 204	20	110	62	52	25,5	10	13	42	27	32	15	33,3	31	12,7	0,54
UCFB 205	25	116	68	56	27	10	13	45	27	34	16	35,8	34,1	14,3	0,79
UCFB 206	30	130	78	65	31	10	13	50	29	40	18	40,2	38,1	15,9	0,95
UCFB 207	35	144	90	70	34	10	15	55	32	46	19	44,4	42,9	17,5	1,29
UCFB 208	40	164	100	78	36	12	16	60	41	50	21	51,2	49,2	19	1,78
UCFB 209	45	174	106	80	38	12	18	65	43	54	22	52,2	49,2	19	1,91
UCFB 210	50	184	112	86	40	12	18	68	46	58	22	54,6	51,6	19	2,36



FLÄNSLAGERHUS UCFC - I GJUTJÄRN

BEARING UCFC - IN CAST IRON

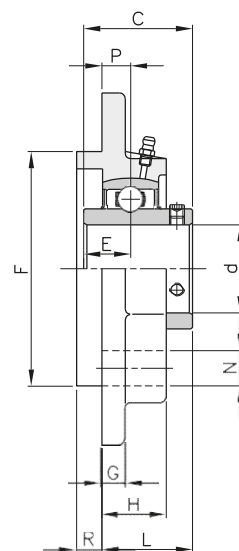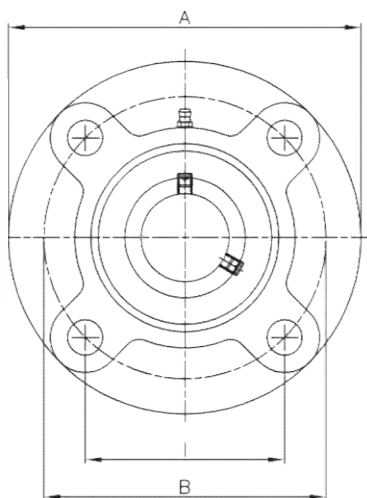



Lager	d	A	B	I	P	N	R	G	H	F	L	C	E	Kg.
UCFC 204	20	100	78	55,1	10	12	5	7	20,5	62	28,3	31	12,7	0,69
UCFC 205	25	115	90	63,6	10	12	6	7	21	70	29,8	34,1	14,3	1,00
UCFC 206	30	125	100	70,7	10	12	8	8	23	80	32,2	38,1	15,9	1,30
UCFC 207	35	136	110	77,8	11	14	8	9	26	90	36,4	42,9	17,5	1,81
UCFC 208	40	145	120	84,8	11	14	10	9	26	100	41,2	49,2	19	2,14
UCFC 209	45	160	132	93,3	12	16	12	14	26	105	40,2	49,2	19	2,68
UCFC 210	50	165	138	97,6	12	16	12	14	28	110	42,6	51,6	19	2,90
UCFC 211	55	185	150	106,1	13	19	12	15	31	125	46,4	55,6	22,2	4,01
UCFC 212	60	195	160	113,1	15	19	12	15	36	135	56,7	65,1	25,4	4,94
UCFC 213	65	205	170	120,2	16	19	14	15	36	145	55,7	65,1	25,4	5,65
UCFC 214	70	215	177	125,1	17	19	14	18	40	150	61,4	74,6	30,2	6,95
UCFC 215	75	220	184	130,1	18	19	16	18	40	160	62,5	77,8	30,3	7,56
UCFC 216	80	240	200	141	18	23	16	18	42	170	67,3	82,6	33,3	9,15



info@transflex.nu

FLÄNSLAGERHUS UCFL - I ROSTFRITT

BEARING UCFL - IN STAINLESS STEEL

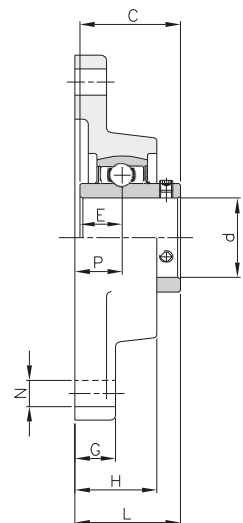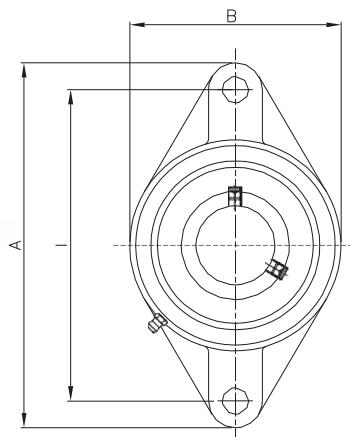

Material:

Hus: AISI 304

Lager: AISI 440


Lager	d	A	I	G	P	H	N	B	L	C	E	Kg.
UCFL 204	20	113	90	10	15	25,5	12	60	33,3	31	12,7	0,49
UCFL 205	25	130	99	10	16	27	16	68	35,7	34	14,3	0,63
UCFL 206	30	148	117	10	18	31	16	80	40,2	38,1	15,9	0,94
UCFL 207	35	161	130	11	19	34	16	90	44,4	42,9	17,5	1,20
UCFL 208	40	175	144	11	21	36	16	100	51,2	49,2	19	1,60
UCFL 209	45	188	148	13	22	38	19	108	52,2	49,2	19	1,90
UCFL 210	50	197	157	13	22	40	19	115	54,6	51,6	19	2,20



info@transflex.nu

FLÄNSLAGERHUS UCFL - I GJUTJÄRN



BEARING UCFL - IN CAST IRON

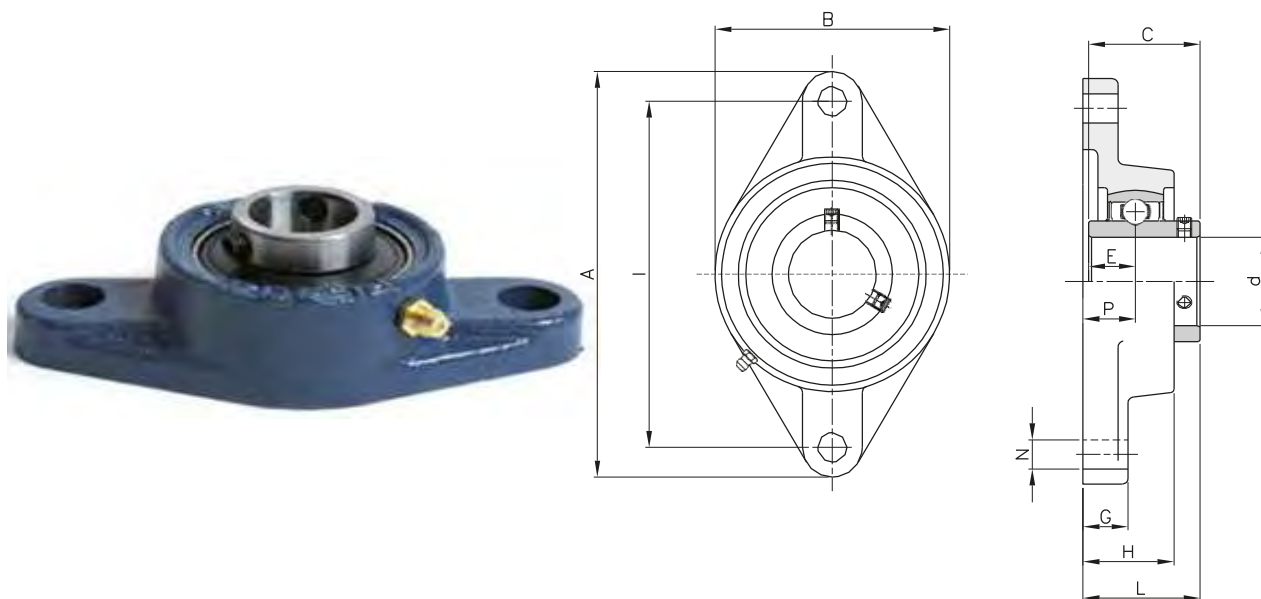

Lager	mm	A	I	P	G	H	N	B	L	C	E	Kg.
UCFL 202	15	113	90	15	11	25,5	12	60	33,3	31	12,7	0,44
UCFL 203	17	113	90	15	11	25,5	12	60	33,3	31	12,7	0,43
UCFL 204	20	113	90	15	11	25,5	12	60	33,3	31	12,7	0,43
UCFL 205	25	130	99	16	13	27	16	68	35,8	34,1	14,3	0,58
UCFL 206	30	148	117	18	13	31	16	80	40,2	38,1	15,9	0,86
UCFL 207	35	161	130	19	14	34	16	90	44,4	42,9	17,5	1,08
UCFL 208	40	175	144	21	14	36	16	100	51,2	49,2	19	1,44
UCFL 209	45	188	148	22	15	38	19	108	52,2	49,2	19	1,74
UCFL 210	50	197	157	22	15	40	19	115	54,6	51,6	19	2,10
UCFL 211	55	224	184	25	18	43	19	130	58,4	55,6	22,2	2,91
UCFL 212	60	250	202	29	18	48	23	140	68,7	65,1	25,4	3,74
UCFL 213	65	258	210	30	22	50	23	155	69,7	65,1	25,4	4,57
UCFL 214	70	265	216	31	22	54	23	160	75,4	74,6	30,2	5,11

HÄNGLAGER ENHET UCHA - I GJUTJÄRN

HANGER BLOCK UNIT UCHA - IN CAST IRON

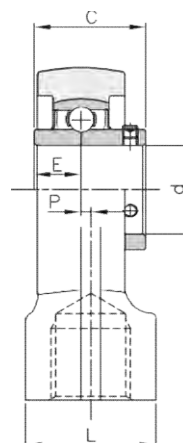
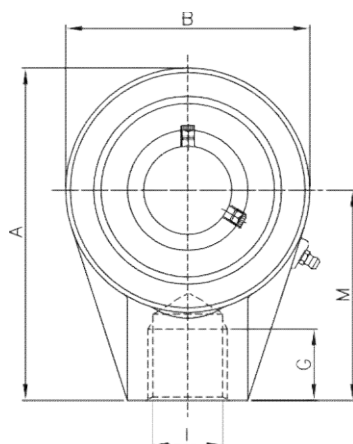


Lager	d	B	A	P	M	L	G	I	C	E	Kg.
UCHA 204	20	64	96		64	40	19	3/4"	31	12,7	0,73
UCHA 205	25	78	103		64	40	19	3/4"	34,1	14,3	0,83
UCHA 206	30	78	103		64	40	19	3/4"	38,1	15,9	0,83
UCHA 207	35	92	116		70	40	19	3/4"	42,9	17,5	1,16
UCHA 208	40	96	121	2	73	40	19	3/4"	49,2	19	1,32
UCHA 209	45	108	136	5	82	48	21	1"	49,2	19	1,72
UCHA 210	50	118	142	5	83	48	21	1"	51,6	19	1,90



FLÄNSLAGERHUS UCP - I ROSTFRITT

BEARING UCP - IN STAINLESS STEEL

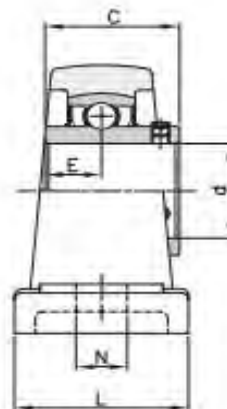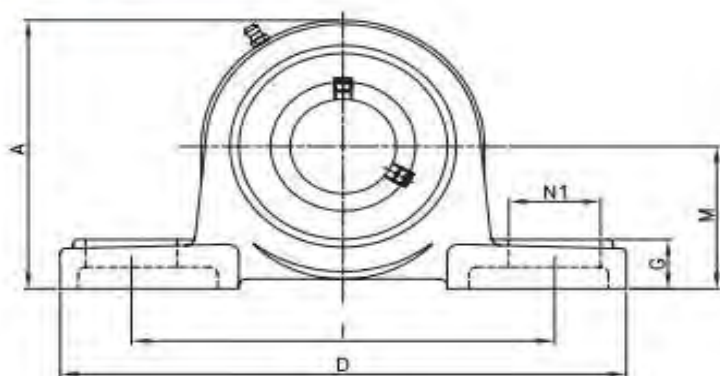

Material:

Hus: AISI 304

Lager: AISI 440



Lager	d	A	I	G	P	H	N	B	L	C	E	Kg.
UCP 204 SS	20	33,3	127	95	15	13	19	65	38	31	12,7	0,65
UCP 205 SS	25	36,5	140	105	16	13	16	70	38	34	14,3	0,79
UCP 206 SS	30	42,9	165	121	18	17	21	83	48	38,1	15,9	1,30
UCP 207 SS	35	47,6	167	127	19	17	21	94	48	42,9	17,5	1,60
UCP 208 SS	40	49,2	184	137	19	17	25	100	54	49,2	19	2,00
UCP 209 SS	45	54	190	146	20	17	22	108	54	49,2	19	2,2
UCP 210 SS	50	57,2	206	159	22	20	25	114	60	51,6	19	2,8



info@transflex.nu

FLÄNSLAGERHUS UCP - I GJUTJÄRN



BEARING UCP - IN CAST IRON

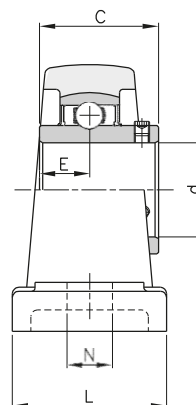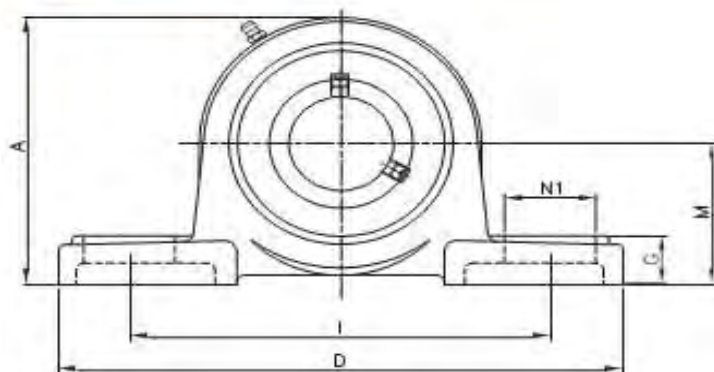

Lager	d	M	D	I	L	N1	N	G	A	C	E	Kg.
UCP 201	12	33,3	127	95	38	19	13	14	65	31	12,7	0,69
UCP 202	15	33,3	127	95	38	19	13	14	65	31	12,7	0,67
UCP 203	17	33,3	127	95	38	19	13	14	65	31	12,7	0,67
UCP 204	20	33,3	127	95	38	19	13	14	65	31	12,7	0,66
UCP 205	25	36,5	140	105	38	19	13	15	71	34,1	14,3	0,81
UCP 206	30	42,9	165	121	46	20	17	17	84	36,1	15,9	1,24
UCP 207	35	47,6	167	127	48	20	17	18	93	42,9	17,5	1,58
UCP 208	40	49,2	184	137	54	20	17	18	100	49,2	19	1,89
UCP 209	45	54	190	146	54	20	17	20	106	49,2	19	2,14
UCP 210	50	57,2	206	159	60	23	20	21	113	51,6	19	2,66
UCP 211	55	63,5	219	171	60	23	20	23	125	55,6	22,2	3,31
UCP 212	60	69,8	241	184	70	23	20	25	138	65,1	25,4	4,00
UCP 213	65	76,2	265	203	70	28	25	27	150	65,1	25,4	5,15
UCP 214	70	79,4	266	210	72	28	25	27	156	74,6	30,2	6,20
UCP 215	75	82,6	275	217	74	28	25	28	162	77,8	33,3	7,16
UCP 216	80	88,9	292	232	78	28	25	30	174	82,6	33,3	8,10

HÄNGLAGER ENHET UCPA - I GJUTJÄRN

HANGER BLOCK UNIT UCPA - IN CAST IRON

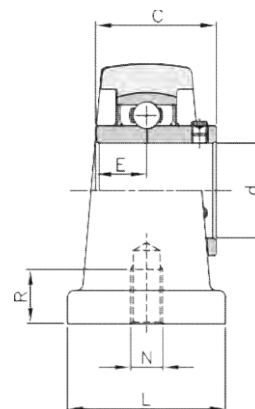
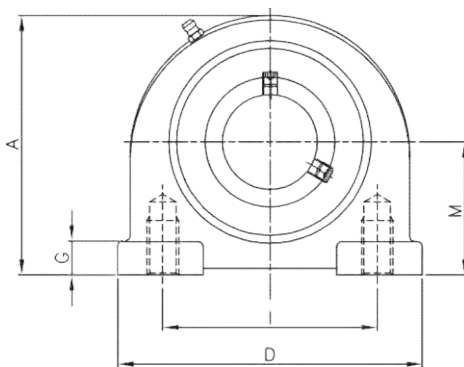


Lager	d	M	D	I	L	N	G	A	R	C	E	Kg.
UCPA 204	20	30,2	76	52	40	M10	11	62	13	31	12,7	0,60
UCPA 205	25	36,5	84	56	38	M10	12	72	13	34,1	14,3	0,83
UCPA 206	30	42,9	94	66	50	M14	12	84	18	38,1	15,9	1,12
UCPA 207	35	47,6	110	80	55	M14	13	95	20	42,9	17,5	1,48
UCPA 208	40	49,2	116	84	58	M14	13	100	20	49,2	19	1,89
UCPA 209	45	54,2	120	90	60	M14	13	108	25	49,2	19	1,98
UCPA 210	50	57,2	130	94	64	M16	14	116	25	51,6	19	2,16



SPÄNNLAGERHUS UCT - I GJUTJÄRN

BEARING UCT - IN CAST IRON

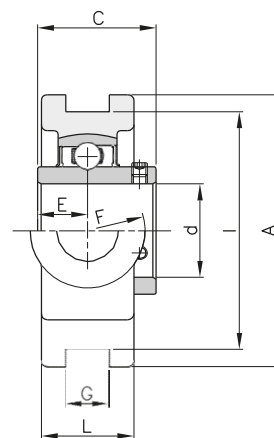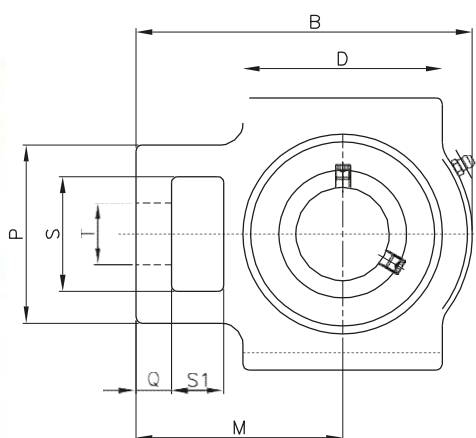

Lager	d	S1	Q	S	F	P	T	D	G	I	A	B	L	M	C	E	Kg.
UCT 204	20	16	10	32	32	51	19	51	12	76	89	94	24	61	31	12,7	0,76
UCT 205	25	16	10	32	32	51	19	51	12	76	89	97	24	62	34,1	14,3	0,81
UCT 206	30	16	10	37	37	56	22	57	12	89	102	113	28	70	38,1	15,9	1,22
UCT 207	35	16	13	37	37	64	22	64	12	89	102	129	30	78	42,9	17,5	1,44
UCT 208	40	19	16	49	49	83	29	83	16	102	114	144	35	83	49,2	19	2,40
UCT 209	45	19	16	49	49	83	29	83	16	102	117	144	35	87	49,2	19	2,36
UCT 210	50	19	16	49	49	83	29	86	16	102	117	149	35	90	51,6	19	2,43
UCT 211	55	25	19	64	64	102	35	95	22	130	146	171	38	106	55,6	22,2	4,11
UCT 212	60	32	19	64	64	102	35	102	22	130	146	194	42	119	65,1	25,4	4,97
UCT 213	65	32	21	70	70	111	41	121	26	151	167	224	44	137	65,1	25,4	6,65
UCT 214	70	32	21	70	70	111	41	121	26	151	167	224	46	137	74,6	30,2	7,05
UCT 215	75	32	21	70	70	111	41	121	26	151	167	232	48	140	77,8	33,3	7,41

